



THE URBAN LIGHT

- LED STREET LIGHTING SERIES
- LED GARDEN LIGHTING SERIES
- LED WALL LIGHTING SERIES
- LED FLOOD LIGHTING SERIES
- LED CEILING LIGHT SERIES
- BOLLARD LIGHTING SERIES
- PARK LIGHTING SERIES
- FLOOD LIGHTING SERIES
- POLE SERIES
- BRACKET SERIES



AUSTAR LIGHTING CO LTD
(NINGBO CHINA)

TEL:+86 574 62982266 62986116 62986066
FAX:+86 574 62986111
<http://www.austarlux.com>, www.austarlux.com.cn
<http://www.chinaaustar.com>, www.austarlux.net
Email: info@austarlux.com austarlux@hotmail.com
skypeaustarlight Msni_danxytg@hotmail.com



Quality LED Lighting



CATALOGUE

GENERAL
LED SERIES

AUSTARLUX

GENERAL
LED SERIES



AUSTAR LIGHTING CO.,LTD

RELIABLE FACTORY

TRUST QUALITY

Factory Profile

Austar Lighting Co.,Ltd is one of leading manufacturers and exporter specialized in outdoor lighting in Ningbo China. The factory is located nearly 50Kms away from Ningbo sea port and 180Kms away from Shanghai sea port which surely strengthen our prompt delivery for your orders.

Our factory covers an area of 12000 square meters, with about 100 employees. We have modern and perfect machines with high technology, there are die-casting line, spray-painting line and assembling line in our company by which we can complete a series of processes such as mould designing and die-casting mechanical tooling and surface dealing and lamp assembling etc. independently. We have lots of modern equipments such as 1250T/900T die-casting machine, 125T punch machine, automatic spray-painting line, aluminium die-casting surface dealing facility, lamps assembling lines etc. The technology and quality has reached international market requirements, most of the products exported to Europe, Asia, South America, Middle-east market etc.

Now we can supply the following lighting products for our customers' choice:

- LED STREET LIGHTING SERIES
- LED GARDEN LIGHTING SERIES
- LED WALL LIGHTING SERIES
- LED FLOOD LIGHTING SERIES
- LED CEILING LIGHT SERIES
- BOLLARD LIGHTING SERIES
- PARK LIGHTING SERIES
- FLOOD LIGHTING SERIES
- POLE SERIES
- BRACKET SERIES

We also have good reputation from our customers, because they are always satisfied with the high quality of products, shortest delivery lead time and our very good after-sale services. We are full of confidence that with the time of flying **AUSTAR LIGHTING** this rising new star will create a new world of brightness together with your effort.



Quality Outdoor Lighting


















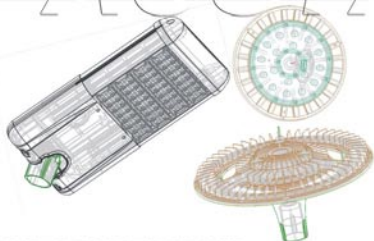
Content

 AST Module 4-5	 AUS Module 6-7	 AUA Module 8-9	 AUT Module 10-11
 TAR Module 12-13	 AUT3013 14-15	 AUT3033 16-17	 AUT3021 18-19
 AUT3041 20-21	 AUT3051 22-23	 AUT3061 24-25	 AUS2001 26-27
 AUA5481 28-29	 AUA5491 30-31	 AUA5511 32-33	 AUA5061 34-35
 AST51811 36-37	 AUA5101 38-39	 AUA5361 40-41	 AUA5471 42-43
 AUA5061 44-45	 AUS5671L 46-47	 AUS5671M 47	 AST57011 48-49
 AUA5821 50-51	 AST5821B 51	 AUA5061 53	 AST50411 55
 AUA60012 57	 AUA6021 59	 AST60512 61	 AST60611 63





			
AST115F2 65	AST1302 70-71	AST1603 72-73	AST1702 74-75
			
AST1803 77	AST1903 79	AUS1152 80-81	AUS115B 80-81
			
AST115V 80-81	AUA185 82-83	AST1862 85	AUA191 87
			
AUA191B 87	AUS197B 89	AUS1982 90-91	AUS198B 90-91



**QUALITY COMES FROM
PROFESSIONAL**



TECHNICAL SPECIFICATIONS

SERIES: ASTModule
MATERIAL: Aluminium body+PC
INPUT VOLTAGE: 120-277VAC
WORKING CURRENT: 700MA
POWER FACTOR: 0.96
LED QTY: 16pcs of LEDs
TOTAL CONSUMPTION: 35W
EFFICACY: >97lm/w
LED: Cree XPGz
BEAM PATTERN: A01
COLOR RENDERING INDEX: More than 75
IP RATING: Ip66
WORKING CONDITION: Temperature: -40°C~55°C
 Humidity: 10%~95%
LIFETIME: More than 50,000 hrs


FEATURES

WARRANTY: 5 Years
POWER SAVING: At least 80% Energy Saving
LONG LIFE: LEDs last for more than 50,000hrs
 (12hrs/day for about 10years)
HEAT DISSIPATION: Patented heat dissipation design,
 achieve optimum efficiency
MODULAR DESIGN: Can replace the module directly,
 if you want another kind of application
LAB TESTED: National listing lab test in
 accordance with IES Standards
SOLID-STATE: High-Shock and High-Vibration Resistant
INSTANT-ON: Light turn on right away without delay in Re-Strike
HIGH CRI: 75 CRI enhances all original colors
APPLICATION: Rural Road, Commercial Square, Garden, Villa

AST MODULE



Item No.	Wattage	Led Qty (Pcs)	Initial Luminous Flux (4000K)	CCT	Driver Efficiency	CRI	Power Factor	Warranty (Years)	Module Code	Module Picture
AST	35	16	3699	4000±300K	>97%	>75	0.96	5	AST	




LED TAR Module

AST MODULE



35W




TECHNICAL SPECIFICATIONS



SERIES: AUS Module
MATERIAL: Aluminum body+PC
INPUT VOLTAGE: 120-277VAC
WORKING CURRENT: 700mA
POWER FACTOR: 0.96
LED QTY: 8pcs of LEDs
TOTAL CONSUMPTION: 18W
EFFICACY: >97lm/w
LED: Cree XP02
BEAM PATTERN: B01
COLOR RENDERING INDEX: More than 75
IP RATING: IP66
WORKING CONDITION: Temperature: -40°C~55°C
 Humidity: 10%~95%
LIFETIME: More than 50,000 hrs

FEATURES

WARRANTY: 5 Years
POWER SAVING: At least 80% Energy Saving
LONG LIFE: LEDs last for more than 50,000hrs
 (12hrs/day for about 10years)
HEAT DISSIPATION: Patented heat dissipation design,
 achieve optimum efficiency
MODULAR DESIGN: Can replace the module directly,
 if you want another kind of application
LAB TESTED: National listing lab test in
 accordance with IES Standards
SOLID-STATE: High-Shock and High-Vibration Resistant
INSTANT-ON: Light turn on right away without delay in Re-Strike
HIGH CRI: 75 CRI enhances all original colors
APPLICATION: Rural Road, Commercial Square, Garden, Villa

AUS MODULE


Item No.	Wattage	Led Qty (Pcs)	Initial Luminous Flux (lm)	GCT	Driver Efficiency	CRI	Power Factor	Warranty (Years)	Module Code	Module Picture
AUS	35	18	3099	4000e300K	>97%	>75	0.96	5	AUS	



LED TAR Module



AUS MODULE



35W



55W



TECHNICAL SPECIFICATIONS

SERIES: AUA Module
MATERIAL: Aluminum body+PC
INPUT VOLTAGE: 120-277VAC
WORKING CURRENT: 700MA
POWER FACTOR: 0.96
LED QTY: 18pcs of LEDs
TOTAL CONSUMPTION: 40W
EFFICACY: >97lm/w
LED: Cree XPG2
BEAM PATTERN: C01
COLOR RENDERING INDEX: More than 75
IP RATING: IP66
WORKING CONDITION: Temperature: -40°C~55°C
 Humidity: 10%~95%
LIFETIME: More than 50,000 hrs


FEATURES

WARRANTY: 5 Years
POWER SAVING: At least 80% Energy Saving
LONG LIFE: LEDs last for more than 50,000hrs
 (12hrs/day for about 10years)
HEAT DISSIPATION: Patented heat dissipation design,
 achieve optimum efficiency
MODULAR DESIGN: Can replace the module directly,
 if you want another kind of application
LAB TESTED: National listing lab test in
 accordance with IES Standards
SOLID-STATE: High-Shock and High-Vibration Resistant
INSTANT-ON: Light turn on right away without delay in Re-Strike
HIGH CRI: 75 CRI enhances all original colors
APPLICATION: Rural Road, Commercial Square, Garden, Villa

AUA MODULE




Item No.	Wattage	LED Qty (Pcs)	Initial Luminous Flux (4000K)	CCT	Driver Efficiency	CRI	Power Factor	Warranty (Years)	Module Code	Module Picture
AUA	40	18	4162	4000±300K	>97%	>75	0.96	5	AUA	




LED TAR Module

AUA MODULE



40W





AUT MODULE



50W



TECHNICAL SPECIFICATIONS

SERIES: AUT Module
MATERIAL: Aluminium body+PC
INPUT VOLTAGE: 120-277VAC
WORKING CURRENT: 700MA
POWER FACTOR: 0.96
LED QTY: 12-21pcs of LEDs
TOTAL CONSUMPTION: 25W-50W
EFFICACY: >97lm/w
LED: Cree XPG2
BEAM PATTERN: D01
COLOR RENDERING INDEX: More than 75
IP RATING: IP65
WORKING CONDITION: Temperature: -40°C~55°C
 Humidity: 10%~95%
LIFETIME: More than 50,000 hrs



FEATURES

WARRANTY: 5 Years
POWER SAVING: At least 60% Energy Saving
LONG LIFE: LEDs last for more than 50,000hrs
 (12hrs/day for about 10years)
HEAT DISSIPATION: Patented heat dissipation design,
 achieve optimum efficiency
MODULAR DESIGN: Can replace the module directly,
 if you want another kind of application
LAB TESTED: National testing lab test in
 accordance with IES Standards
SOLID-STATE: High-Shock and High-Vibration Resistant
INSTANT-ON: Light turn on right away, without delay in Re-Strike
HIGH CRI: 75 CRI enhances all original colors
APPLICATION: Rural Road, Commercial Square, Garden, Villa

AUT MODULE



Item No.	Wattage	Led Qty (Pcs)	Initial Luminous Flux (4000K)	CCT	Driver Efficiency	CRI	Power Factor	Warranty (Years)	Module Code	Module Picture
AUT	50	21	4900	4000±300K	>97%	>75	0.96	5	AUT	



TECHNICAL SPECIFICATIONS

SERIES: TAR Module
MATERIAL: Aluminium body+PC
INPUT VOLTAGE: 120-277VAC
WORKING CURRENT: 700MA
POWER FACTOR: 0.96
LED QTY: 18/30pcs of LEDs
TOTAL CONSUMPTION: 35W-105W
EFFICACY: >97lm/w
LED: Cree XPGz
BEAM PATTERN: E01
COLOR RENDERING INDEX: More than 75
PIPE MOUNTING DIA: 1 in. (26mm)
IP RATING: IP65
WORKING CONDITION: Temperature: -40°C~55°C
 Humidity: 10%~95%
LIFETIME: More than 50,000 hrs


FEATURES

WARRANTY: 5 Years
POWER SAVING: At least 80% Energy Saving
LONG LIFE: LEDs last for more than 50,000hrs
 (12hrs/day for about 10years)
HEAT DISSIPATION: Patented heat dissipation design,
 achieve optimum efficiency
MODULAR DESIGN: Can replace the module directly,
 if you want another kind of application
LAB TESTED: National testing lab test in
 accordance with IES Standards
SOLID-STATE: High-Shock and High-Vibration Resistant
INSTANT-ON: Light turn on right away without delay in Re-Strike
HIGH CRI: 75 CRI enhances all original colors
APPLICATION: Rural Road, Commercial Square, Garden, Villa


TAR MODULE



Item No.	Wattage	Led Qty	Initial Luminous Flux (lm)	CCT	Driver Efficiency	Driver	Pos/Cir	Wt(g)	Cut Size (cm)	Lamp Dimension(mm)
TAR MODULE	50	30	4968	4000k 303K	>97%	INCLJD	12	16	63x48x20	L260*F223*H85





CREE 30PCS



LED TAR Module

TAR MODULE



TECHNICAL SPECIFICATIONS

SERIES: AUT3011~14

MATERIAL: Aluminium body+PC

INPUT VOLTAGE: 120-277VAC

WORKING CURRENT: 700MA

POWER FACTOR: 0.96

LED QTY: 12/21pcs of LEDs

TOTAL CONSUMPTION: 25W-50W

EFFICACY: >87lm/w

LED: Cree XPG2

BEAM PATTERN: D01

COLOR RENDERING INDEX: More than 75

PIPE MOUNTING DIA: 1.89-2.36 in. (48mm-60mm)

IP RATING: IP65

WORKING CONDITION: Temperature: -40°C~55°C

Humidity: 10%-95%

LIFETIME: More than 50,000 hrs

FEATURES

WARRANTY: 5 years

POWER SAVING: At least 60% Energy Saving

LONG LIFE: LEDs last for more than 50,000hrs

(12hrs/day for about 10years)

HEAT DISSIPATION: Patented heat dissipation design,

achieve optimum efficiency

MODULAR DESIGN: Can replace the module directly,

if you want another kind of application

KNUCKLE: Can adjust the angle from 0 degree to 90 degree

LAB TESTED: National listing lab test in

accordance with IES Standards

SOLID-STATE: High-Shock and High-Vibration Resistant


INSTANT-ON: Light turn on right away, without delay in Re-Strike


HIGH CRI: 75 CRI enhances all original colors

APPLICATION: Main Road, Express Way, Rural Road,

Commercial Square, Garden, Villa

AUT3011~14

Item No.	Wattage	Led Qty (Pcs)	Initial Luminous Flux (4000K)	CCT	Driver Efficiency	CRI	Power Factor	Warranty (Years)	Module Code	Module Picture
AUT3011	25/50	12/21	2770/4855	4000±300K	>97%	>75	0.96	5	AUT	
AUT3012	25/50	12/21	2770/4855	4000±300K	>97%	>75	0.96	5	AUT	
AUT3013	25/50	12/21	2770/4855	4000±300K	>97%	>75	0.96	5	AUT	
AUT3014	25/50	12/21	2770/4855	4000±300K	>97%	>75	0.96	5	AUT	



Ordering info	Example: AUT3011 Garden Light Ordering Code: AUT3011, 50W, D01, 40, 5G, V22, 1					
	1	2	3	4	5	6
1. Wattage	AUT3011: 25W	AUT3011: 50W	AUT3014: 25W	AUT3012: 25W	AUT3012: 50W	AUT3014: 50W
2. Light Distribution	D01					
3. Color Temp	30: 3000±300K 40: 4000±300K 50: 5000±300K					
4. Housing Color	GY: Dark Grey SG: Silver Grey BK: Black DG: Dark Green WH: White					
5. Input Voltage	V22: AC 220-240 V V27: AC 100-277V					
6. Philips Driver	0: Without 1: With					

LED Garden Light Series



AUT3011

50W



AUT3012



AUT3013



AUT3014



TECHNICAL SPECIFICATIONS


SERIES: AUT3031~34
MATERIAL: Aluminium body+PC
INPUT VOLTAGE: 120-277VAC
WORKING CURRENT: 700MA
POWER FACTOR: 0.96
LED QTY: 12/21pcs of LEDs
TOTAL CONSUMPTION: 25W-50W
EFFICACY: >97lm/w
LED: Cree XPG2
BEAM PATTERN: D01
COLOR RENDERING INDEX: More than 75
PIPE MOUNTING DIA: 140mm
IP RATING: IP65
WORKING CONDITION: Temperature: -40°C~55°C
 Humidity: 10%~95%
LIFETIME: More than 50,000 hrs


FEATURES

WARRANTY: 5 years
POWER SAVING: At least 80% Energy Saving
LONG LIFE: LEDs last for more than 50,000hrs
 (12hrs/day for about 10years)
HEAT DISSIPATION: Patented heat dissipation design,
 achieve optimum efficiency
MODULAR DESIGN: Can replace the module directly,
 if you want another kind of application
KNUCKLE: Can adjust the angle from 0 degree to 90 degree
LAB TESTED: National listing lab test in
 accordance with IES Standards
SOLID-STATE: High-Shock and High-Vibration Resistant
INSTANT-ON: Light turn on right away, without delay in Re-Strike
HIGH CRI: 75 CRI enhances all original colors
APPLICATION: Main Road, Express Way, Rural Road,
 Commercial Square, Garden, Villa

AUT3031~34

CE GS IP65

Item No.	Wattage	LED Qty (Pcs)	Initial Luminous Flux (lm)	CCT (lmK)	Driver Efficiency	CRI	Power Factor	Warranty (Years)	Module Code	Module Picture
AUT3031	25-50	12/21	2770/4855	4300~300K	>97%	>75	0.96	5	AUT	
AUT3032	25-50	12/21	2770/4855	4300~300K	>97%	>75	0.96	5	AUT	
AUT3033	25-50	12/21	2770/4855	4300~300K	>97%	>75	0.96	5	AUT	
AUT3034	25-50	12/21	2770/4855	4300~300K	>97%	>75	0.96	5	AUT	



Ordering info

Example: AUT3031 Bollard Light
 Ordering Code: AUT3031_50W_D01_40_SG_V22_1_300
 1 2 3 4 5 6 7

1. Wattage

AUT3031_25W AUT3031_50W AUT3034_25W
 AUT3032_25W AUT3032_50W AUT3034_50W
 AUT3033_25W AUT3033_50W

2. Light Distribution

D01

3. Color Temp

30: 3000~300K 40: 4000~300K 50: 5000~300K

4. Housing Color

GY: Dark Grey SG: Silver Grey BK: Black DG: Dark Green WH: White

5. Input Voltage

V22: AC 220-240 V V27: AC 100-277V

6. Philips Driver

0: Without 1: With

7. Height

50: 50CM 100: 100CM 200: 200CM 300: 300CM 400: 400CM

LED Bollard Light Series



AUT3031

25W

AUT3032

AUT3033

AUT3034



TECHNICAL SPECIFICATIONS

SERIES: AUT3021
MATERIAL: Aluminium body+PC
INPUT VOLTAGE: 120-277VAC
WORKING CURRENT: 700MA
POWER FACTOR: 0.96
LED QTY: 27/42pcs of LEDs
TOTAL CONSUMPTION: 60W-90W
EFFICACY: >97lm/w
LED: Cree XPG2
BEAM PATTERN: D01
COLOR RENDERING INDEX: More than 75
PIPE MOUNTING DIA: 1.89-2.36 in. (48mm-60mm)
IP RATING: IP65
WORKING CONDITION: Temperature: -40C ~55 C
 Humidity: 10%-95%
LIFETIME: More than 50,000 hrs



FEATURES

WARRANTY: 5 years
POWER SAVING: At least 60% Energy Saving
LONG LIFE: LEDs last for more than 50,000hrs
 (12hrs/day for about 10years)
HEAT DISSIPATION: Patented heat dissipation design,
 achieve optimum efficiency
MODULAR DESIGN: Can replace the module directly,
 if you want another kind of application
KNUCKLE: Can adjust the angle from 0 degree to 90 degree
LAB TESTED: National testing lab test in
 accordance with IES Standards
SOLID-STATE: High-Shock and High-Vibration Resistant
INSTANT-ON: Light turn on right away, without delay in Re-Strikes
HIGH CRI: 75 CRI enhances all original colors
APPLICATION: Main Road, Express Way, Rural Road,
 Commercial Square, Garden, Villa

AUT3021



Item No.	Wattage	Led Qty	Initial Luminous Flux (4000K)	CCT	Driver Efficiency	CRI	Power Factor	Warranty (Years)	Module Code	Module Picture
AUT3021	60	27	8196	4000±300K	>87%	>75	0.96	5	AUT	
AUT3021	90	42	9200	4000±300K	>87%	>75	0.96	5	AUT	



Ordering info

Example: AUT3021 Garden Light
 Ordering Code: AUT3021_90W_D01_40_SG_V22_1
 1 2 3 4 5 6

1.Wattage

AUT3021_60W
 AUT3021_90W

2.Light Distribution

D01

3.Color Temp

30: 3000±300K 40: 4000±300K 50: 5000±300K

4.Housing Color

GY: Dark Grey SG: Silver Grey BK: Black DG: Dark Green WH: White

5.Input Voltage

V22: AC 220-240 V V27: AC 105-277V

6.Philips Driver

0: Without 1: With

LED Street Light Series



TECHNICAL SPECIFICATIONS

SERIES: AUT3041
MATERIAL: Aluminium body+PC
INPUT VOLTAGE: 120-277VAC
WORKING CURRENT: 700MA
POWER FACTOR: 0.96
LED QTY: 27/42pcs of LEDs
TOTAL CONSUMPTION: 60W-90W
EFFICACY: >97lm/w
LED: Cree XPG2
BEAM PATTERN: D01
COLOR RENDERING INDEX: More than 75
PIPE MOUNTING DIA.: 1.89-2.36 in. (48mm-60mm)
IP RATING: IP65
WORKING CONDITION: Temperature -40°C ~55°C
 Humidity: 10%-95%
LIFETIME: More than 50,000 hrs

FEATURES

WARRANTY: 5 years
POWER SAVING: At least 60% Energy Saving
LONG LIFE: LEDs last for more than 50,000hrs
 (12hr/day for about 10years)
HEAT DISSIPATION: Patented heat dissipation design,
 achieve optimum efficiency
MODULAR DESIGN: Can replace the module directly,
 if you want another kind of application
KNUCKLE: Can adjust the angle from 0 degree to 90 degree
LAB TESTED: National testing lab test in
 accordance with IES Standards
SOLID-STATE: High-Shock and High-Vibration Resistant
INSTANT-ON: Light turn on right away without delay in Re-Strike
HIGH CRI: 75 CRI enhances all original colors
APPLICATION: Main Road, Express Way, Rural Road,
 Commercial Square, Garden, Villa

LED Pendant Light Series



AUT3041

90W

AUT3041



Item No.	Wattage	LED Qty (Pcs)	Initial Luminous Flux (4000K)	CCT	Driver Efficiency	CRI	Power Factor	Warranty (Years)	Module Code	Module Picture
AUT3041	60	27	6195	4000±300K	>97%	>75	0.96	5	AUT	
AUT3041	90	42	9200	4000±300K	>97%	>75	0.96	5	AUT	

TOP TYPE 01

TOP TYPE 02

TOP TYPE 03



TOP TYPE 01

TOP TYPE 02

TOP TYPE 03

Ordering info

Example AUT3041 Garden Pendant Light
 Ordering Code: AUT3041, 90W, D01, 40, SG, V22, 1, 01
 1 2 3 4 5 6 7

1.Wattage

AUT3041: 60W
 AUT3041: 90W

2.Light Distribution

D01

3.Color Temp

30: 3000±300K 40: 4000±300K 50: 5000±300K

4.Housing Color

GY: Dark Grey SG: Silver Grey BK: Black DG: Dark Green WH: White

5.Input Voltage

V22: AC 220-240 V V27: AC 100-277V

6.Philips Driver

0: Without 1: With

7.Top Type

01: Type01 02: Type02 03: Type03



TECHNICAL SPECIFICATIONS

SERIES: AUT3051
MATERIAL: Aluminium body+PC
INPUT VOLTAGE: 120-277VAC
WORKING CURRENT: 700MA
POWER FACTOR: 0.96
LED QTY: 12/21pcs of LEDs
TOTAL CONSUMPTION: 25W-50W
EFFICACY: >97lm/w
LED: Cree XPG2
BEAM PATTERN: D01
COLOR RENDERING INDEX: More than 75
PIPE MOUNTING DIA: 140mm
IP RATING: IP65
WORKING CONDITION: Temperature: -40°C ~ 55°C
 Humidity: 10%~95%
LIFETIME: More than 50,000 hrs

FEATURES

WARRANTY: 5 years
POWER SAVING: At least 80% Energy Saving
LONG LIFE: LEDs last for more than 50,000hrs
 (12hrs/day for about 10years)
HEAT DISSIPATION: Patented heat dissipation design,
 achieve optimum efficiency
MODULAR DESIGN: Can replace the module directly,
 if you want another kind of application
KNUCKLE: Can adjust the angle from 0 degree to 90 degree
LAB TESTED: National lighting lab test in
 accordance with IES Standards
SOLID-STATE: High-Shock and High-Vibration Resistant
INSTANT-ON: Light turn on right away, without delay in Re-Starts
HIGH CRI: 75 CRI enhances all original colors
APPLICATION: Main Road, Express Way, Rural Road,
 Commercial Square, Garden, Villa

LED Pendant Light Series




AUT3051

50W

AUT3051



Item No.	Wattage	Led Qty (Pcs)	Initial Luminous Flux (4000K)	CCT	Driver Efficiency	CRI	Power Factor	Warranty (Years)	Module Code	Module Picture
AUT3051	25	12	2770	4000±300K	>97%	>75	0.96	5	AUT	
AUT3051	50	21	4855	4000±300K	>97%	>75	0.96		AUT	

TOP TYPE 01**TOP TYPE 02****TOP TYPE 03****Ordering info**

Example AUT3051 Garden Pendant Light
 Ordering Code: **AUT3051_50W_01_40_SG_V22_1_01**
 1 2 3 4 5 6 7

1.Wattage

AUT3051: 25W
 AUT3051: 50W

2.Light Distribution

D01

3.Color Temp

30: 3000±300K 40: 4000±300K 50: 5000±300K

4.Housing Color

GY: Dark Grey SG: Silver Grey BK: Black DG: Dark Green WH: White

5.Input Voltage

V22: AC 220-240 V V27: AC 100-277V

6.Philips Driver

0: Without 1: With

7.Top Type

01: Type01 02: Type02 03: Type03



TECHNICAL SPECIFICATIONS

SERIES: AUT3061
MATERIAL: Aluminum body+PC
INPUT VOLTAGE: 120-277VAC
WORKING CURRENT: 700MA
POWER FACTOR: 0.96
LED QTY: 12/21pcs of LEDs
TOTAL CONSUMPTION: 25W-50W
EFFICACY: >97lm/w
LED: Cree XPGz
BEAM PATTERN: D01
COLOR RENDERING INDEX: More than 75
PIPE MOUNTING DIA: 140mm
IP RATING: IP65
WORKING CONDITION: Temperature: -40°C~55°C
 Humidity: 10%~95%
LIFETIME: More than 50,000 hrs


FEATURES

WARRANTY: 5 years
POWER SAVING: At least 80% Energy Saving
LONG LIFE: LEDs last for more than 50,000hrs
 (12hrs/day for about 10years)
HEAT DISSIPATION: Patented heat dissipation design,
 achieve optimum efficiency
MODULAR DESIGN: Can replace the module directly,
 if you want another kind of application
KNUCKLE: Can adjust the angle from 0 degree to 90 degree
LAB TESTED: National listing lab test in
 accordance with IES Standards
SOLID-STATE: High-Shock and High-Vibration Resistant
INSTANT-ON: Light turn on right away, without delay in Re-Strike
HIGH CRI: 75 CRI enhances all original colors
APPLICATION: Main Road, Express Way, Rural Road,
 Commercial Square, Garden, Villa

AUT3061



Item No.	Wattage	Led Qty	Initial/Luminous Flux (4000K)	CCT	Driver Efficiency (%)	CRI	Power Factor	Warranty (Years)	Module Code	Module Picture
AUT3061	25-50	12/21	2770/4855	4000±300K	>91%	>73	0.96	5	AUT	
AUT3062	25-50	12/21	2770/4855	4000±300K	>91%	>73	0.96	5	AUT	
AUT3063	25-50	12/21	2770/4855	4000±300K	>91%	>73	0.96	5	AUT	

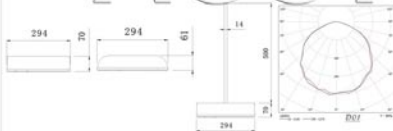

Ordering info	Example AUT3061 Ceiling Light Ordering Code AUT3061_50W_D01_40_SG_V22_1
1.Wattage	AUT3061: 25W AUT3061: 50W
2.Light Distribution	D01
3.Color Temp	30: 3000±300K 40: 4000±300K 50: 5000±300K
4.Housing Color	GY: Dark Grey SG: Silver Grey BK: Black DG: Dark Green WH: White
5.Input Voltage	V22: AC 220-240 V V27: AC 100-277V
6.Philips Driver	0: Without 1: With

LED Ceiling Light Series



AUT3061

50W



AUT3062

TECHNICAL SPECIFICATIONS

SERIE: AUS2001
MATERIAL: Aluminum body+PC
INPUT VOLTAGE: 120-277VAC
WORKING CURRENT: 700MA
POWER FACTOR: 0.96
LED QTY: 16pcs of LEDs
TOTAL CONSUMPTION: 35W
EFFICACY: >97lm/w
LED: Cree XPG2
BEAM PATTERN: B01
COLOR RENDERING INDEX: More than 75
IP RATING: IP65
WORKING CONDITION: Temperature: -40°C~55°C
 Humidity: 10%~95%
LIFETIME: More than 50,000 hrs


FEATURES

WARRANTY: 5 years
POWER SAVING: At least 60% Energy Saving
LONG LIFE: LEDs last for more than 50,000hrs
 (12hrs/day for about 10years)
HEAT DISSIPATION: Patented heat dissipation design,
 achieve optimum efficiency
MODULAR DESIGN: Can replace the module directly,
 if you want another kind of application
KNUCKLE: Can adjust the angle from 0 degree to 90 degree
LAB TESTED: National listing lab test in
 accordance with IES Standards
SOLID-STATE: High-Shock and High-Vibration Resistant
INSTANT-ON: Light turn on right away without delay in Re-Strike
HIGH CRI: 75 CRI enhances all original colors
APPLICATION: Main Road, Express Way, Rural Road,
 Commercial Square, Garden, Villa

AUS2001



Item No.	Wattage	Led Qty	Initial Luminous Flux (4000K)	CCT	Driver Efficiency	CRI	Power Factor	Warranty (Years)	Module Code	Module Picture
AUS2001	35	16	3699	4000±300K	>97%	>75	0.96	5	AUS	

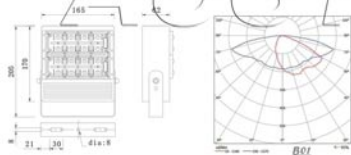

Ordering info

Example: AUS2001 Spot Light
 Ordering Code: AUS2001_35W_B01_40_SG_V22_1

1. Wattage

AUS2001: 35W
 AUS2003: 55W
 AUS2004: 75W

2. Light Distribution

B01

3. Color Temp

30: 3000±300K 40: 4000±300K 50: 5000±300K

4. Housing Color

GY: Dark Grey SG: Silver Grey BK: Black DG: Dark Green WH: White

5. Input Voltage

V22: AC 220-240 V V27: AC 100-277V

6. Philips Driver

0: Without 1: With

LED Flood Light Series




AUS2001

35W



AUS2001A



TECHNICAL SPECIFICATIONS


SERIES: AUA5481
MATERIAL: Aluminium body+PC
INPUT VOLTAGE: 120-277VAC
WORKING CURRENT: 700MA
POWER FACTOR: S 98
LED QTY: 18pcs of LEDs
TOTAL CONSUMPTION: 40W
EFFICACY: >97lm/w
LED: Cree XPG2
BEAM PATTERN: C01
COLOR RENDERING INDEX: More than 75
PIPE MOUNTING DIA: 220mm
IP RATING: IP65
WORKING CONDITION: Temperature: -40°C ~ 55°C
 Humidity: 10% ~ 95%
LIFETIME: More than 50,000 hrs

FEATURES

WARRANTY: 5 years
POWER SAVING: At least 90% Energy Saving
LONG LIFE: LEDs last for more than 50,000hrs
 (12hrs/day for about 10years)
HEAT DISSIPATION: Patented heat dissipation design,
 achieve optimum efficiency
MODULAR DESIGN: Can replace the module directly,
 if you want another kind of application
KNUCKLE: Can adjust the angle from 0 degree to 90 degree
LAB TESTED: National listing lab test in
 accordance with IES Standards
SOLID STATE: High Shock and High-Vibration Resistant
INSTANT ON: Light turn on right away, without delay in Re-Strike
HIGH CRI: 75 CRI enhances all original colors
APPLICATION: Main Road, Express Way, Rural Road,
 Commercial Square, Garden, Villa

AUA5481

Item No.	Wattage	Lead Qty (Pcs)	Initial Luminous Flux (4000K)	CCT	Driver Efficiency	CRI	Power Factor	Warranty (Years)	Module Code	Module Picture
AUA5481	40	18	4162	4000±300K	>97%	>75	0.96	5	AUA	

**Ordering info**

Example: AUA5481 Garden Light
 Ordering Code: **AUA5481-40W-C01-40-SG-V22-1**

1. Wattage

AUA5481-40W

3. Light Distribution

C01

3. Color Temp

30: 3000±300K 40: 4000±300K 50: 5000±300K

4. Housing Color

GY: Dark Grey SG: Silver Grey BK: Black DG: Dark Green WH: White

5. Input Voltage

V22: AC 220-240 V V27: AC 100-277V

6. Philips Driver


0: Without 1: With

LED Park Light Series

ARLUX

AUA5481

40W





TECHNICAL SPECIFICATIONS

SERIES: AUA5491
MATERIAL: Aluminum body+PC
INPUT VOLTAGE: 120-277VAC
WORKING CURRENT: 700MA
POWER FACTOR: 0.96
LED QTY: 18pcs of LEDs
TOTAL CONSUMPTION: 40W
EFFICACY: >97lm/w
LED: Cree XP/G2
BEAM PATTERN: C01
COLOR RENDERING INDEX: More than 75
PIPE MOUNTING DIA: 220mm
IP RATING: IP65
WORKING CONDITION: Temperature: -40°C~55°C
 Humidity: 10%~95%
LIFETIME: More than 50,000 hrs


FEATURES

WARRANTY: 5 years
POWER SAVING: At least 80% Energy Saving
LONG LIFE: LEDs last for more than 50,000hrs
 (12hrs/day for about 10years)
HEAT DISSIPATION: Patented heat dissipation design,
 achieve optimum efficiency
MODULAR DESIGN: Can replace the module directly,
 if you want another kind of application
KNUCKLE: Can adjust the angle from 0 degree to 90 degree
LAB TESTED: National listing lab test in
 accordance with IES Standards
SOLID-STATE: High-Shock and High-Vibration Resistant
INSTANT-ON: Light turn on right away, without delay in Re-Strike
HIGH CRI: 75 CRI enhances all original colors
APPLICATION: Main Road, Express Way, Rural Road,
 Commercial Square, Garden, Villa

AUA5491



Item No.	Wattage	Led Qty (Pcs)	Initial Luminous Flux (4000K)	CCT	Driver Efficiency	CRI	Power Factor	Warranty (Years)	Module Code	Module Picture
AUA5491	40	18	1162	4000±300K	>97%	>75	0.96	5	AUA	



Ordering info	Example AUA5491 Garden Light Ordering Code AUA5491 , 40W , C01, 40, SG, V22, 1
1.Wattage	AUA5491: 40W
2.Light Distribution	C01
3.Color Temp	30: 3000±300K 40: 4000±300K 50: 5000±300K
4.Housing Color	GY: Dark Grey SG: Silver Grey BK: Black DG: Dark Green WH: White
5.Input Voltage	V22: AC 220-240 V V27: AC 100-277V
6.Philips Driver	0: Without 1: With

AUA5491
40W



TECHNICAL SPECIFICATIONS

SERIE: AUA5551
MATERIAL: Aluminum body+PC
INPUT VOLTAGE: 120-277VAC
WORKING CURRENT: 700MA
POWER FACTOR: 0.96
LED QTY: 18pcs of LEDs
TOTAL CONSUMPTION: 40W
EFFICACY: >97lm/w
LED: Cree XPG2
BEAM PATTERN: C01
COLOR RENDERING INDEX: More than 75
PIPE MOUNTING DIA: 220mm
IP RATING: IP65
WORKING CONDITION: Temperature: -40°C~55°C
 Humidity: 10%~95%
LIFETIME: More than 50,000 hrs


FEATURES

WARRANTY: 5 years
POWER SAVING: At least 60% Energy Saving
LONG LIFE: LEDs last for more than 50,000hrs
 (12hrs/day for about 10years)
HEAT DISSIPATION: Patented heat dissipation design,
 achieve optimum efficiency
MODULAR DESIGN: Can replace the module directly,
 if you want another kind of application
KNUCKLE: Can adjust the angle from 0 degree to 90 degree
LAB TESTED: National listing lab test in
 accordance with IES Standards
SOLID-STATE: High-Shock and High-Vibration Resistant
INSTANT-ON: Light turn on right away without delay in Re-Strike
HIGH CRI: 75 CRI enhances all original colors
APPLICATION: Main Road, Express Way, Rural Road,
 Commercial Square, Garden, Villa

AUA5551



Item No.	Wattage	Led Qty (Pcs)	Initial Luminous Flux (lm)	CCT	Driver Efficiency	CRI	Power Factor	Warranty (Years)	Module Code	Module Picture
AUA5551	40	18	4162	4000±300K	>97%	>75	0.96	5	AUA	



Ordering info

Example AUA5551 Garden Light
 Ordering Code: AUA5551_40W_C01_40_SG_V22_1

1. Wattage

AUA5551_40W

2. Light Distribution

C01

3. Color Temp

30: 3000±300K 40: 4000±300K 50: 5000±300K

4. Housing Color

GY: Dark Grey SG: Silver Grey BK: Black DG: Dark Green WH: White

5. Input Voltage

V22: AC 220-240 V V27: AC 100-277V

6. Philips Driver

0 Without 1 With

LED Garden Light Series



AUA5551

40W



TECHNICAL SPECIFICATIONS

SERIES: AUA5061
MATERIAL: Aluminum body+PC
INPUT VOLTAGE: 120-277VAC
WORKING CURRENT: 700MA
POWER FACTOR: 0.96
LED QTY: 16pcs of LEDs
TOTAL CONSUMPTION: 40W
EFFICACY: >97lm/w
LED: Cree XPGz
BEAM PATTERN: C01
COLOR RENDERING INDEX: More than 75
PIPE MOUNTING DIA: 220mm
IP RATING: IP65
WORKING CONDITION: Temperature: -40°C~55°C
 Humidity: 10%~95%
LIFETIME: More than 50,000 hrs




FEATURES

WARRANTY: 5 Years
POWER SAVING: At least 80% Energy Saving
LONG LIFE: LEDs last for more than 50,000hrs
 (12hrs/day for about 10years)
HEAT DISSIPATION: Patented heat dissipation design,
 achieve optimum efficiency
MODULAR DESIGN: Can replace the module directly,
 if you want another kind of application
LAB TESTED: National testing lab test
 in accordance with IES Standards
SOLID-STATE: High-Shock and High-Vibration Resistant
INSTANT-ON: Light turn on right away without delay in Re-Strike
 HIGH CRI: 75 CRI enhances all original colors
APPLICATION: Rural Road, Commercial Square, Garden, Villa

AUA5061



Item No.	Wattage	Led Qty (Pcs)	Initial Luminous Flux (4000K)	CCT	Driver Efficiency	CRI	Power Factor	Warranty (Years)	Module Code	Module Picture
AUS50612	35	16	3699	4000±300K	>97%	>75	0.96	5	AUS	
AUS50613	55	24	5529	4000±300K	>97%	>75	0.96	5	AUS	
AUA5061	40	16	4182	4000±300K	>97%	>75	0.96	5	AUA	
AUT5061	28/50	12/21	2770/4855	4000±300K	>97%	>75	0.96	5	AUT	



Ordering info

Example AUA5061 Garden Light
 Ordering Code: AUA5061 - 40W, C01, 40, SG, V22, 1
 1 2 3 4 5 6

1.Wattage

AUA5061: 40W AUT5061: 25W
 AUS50612 35W AUT5061: 50W
 AUS50613 55W

2.Light Distribution

B01 C01 D01

3.Color Temp

30 3000±300K 40: 4000±300K 50: 5000±300K

4.Housing Color

GY: Dark Grey SG: Silver Grey BK: Black DG: Dark Green WH: White

5.Input Voltage

V22: AC 220-240 V V27: AC 100-277V

6.Philips Driver

0: Without 1: With

AUS50612


35W

LED Garden Light Series



AUA5061

40W



AUS50612

35W



TECHNICAL SPECIFICATIONS

SERIES: AST51811~
MATERIAL: Aluminum body+PC
INPUT VOLTAGE: 120-277VAC
WORKING CURRENT: 700MA
POWER FACTOR: 0.96
LED QTY: 16~32pcs of LEDs
TOTAL CONSUMPTION: 35W-70W
EFFICACY: >97lm/w
LED: Cree XPG2
BEAM PATTERN: A01, C02
COLOR RENDERING INDEX: More than 75
PIPE MOUNTING DIA: 60mm
IP RATING: IP65
WORKING CONDITION: Temperature: -40°C~55°C
 Humidity: 10%~95%
LIFETIME: More than 50,000 hrs


FEATURES

WARRANTY: 5 Years
POWER SAVING: At least 60% Energy Saving
LONG LIFE: LEDs last for more than 50,000hrs
 (12hrs/day for about 10years)
HEAT DISSIPATION: Patented heat dissipation design,
 achieve optimum efficiency
MODULAR DESIGN: Can replace the module directly,
 if you want another kind of application
LAB TESTED: National testing lab test in
 accordance with IES Standards
SOLID-STATE: High-Shock and High-Vibration Resistant
INSTANT-ON: Light turn on right away, without delay in Re-Strike
HIGH CRI: 75 CRI enhances all original colors
APPLICATION: Rural Road, Commercial Square, Garden, Villa


AST51811~12



Item No.	Wattage	LED Qty (Pcs)	Initial Luminous Flux (lm)	CCT	Driver Efficiency	CRI	Power Factor	Warranty (Years)	Module Code	Module Picture
AGT51811	35	16	3699	4000±300K	>91%	>75	0.96	5	AGT	
AGT51812	70	32	7042	4000±300K	>91%	>75	0.96	5	AGT	
AUA5181	40	18	4462	4000±300K	>91%	>75	0.96	5	AUA	



A01



C02

Ordering info

Example AST51811 Garden Light
 Ordering Code: AST51811_35W_A01_40_SG_V22_1

1 2 3 4 5 8

1. Wattage

AST51811 35W
 AST51812 70W
 AUA5181 40W

2. Light Distribution

A01 C01

3. Color Temp

30: 3000±300K 40: 4000±300K 50: 5000±300K

4. Housing Color

GY: Dark Grey SG: Silver Grey BK: Black DG: Dark Green WH: White

5. Input Voltage

V22: AC 220-240 V V27: AC 100-277V

6. Philips Driver


0: Without 1: With

LED Garden Light Series



AST51811

35W



AST51812

70W

TECHNICAL SPECIFICATIONS

SERIES: AST51911~
MATERIAL: Aluminium body+PC
INPUT VOLTAGE: 120-277VAC
WORKING CURRENT: 700MA
POWER FACTOR: 0.96
LED QTY: 16-32pcs of LEDs
TOTAL CONSUMPTION: 35W-70W
EFFICACY: >97lm/w
LED: Cree XPG2
BEAM PATTERN: A01, C01, D01
COLOR RENDERING INDEX: More than 75
PIPE MOUNTING DIA: 76mm
IP RATING: IP65
WORKING CONDITION: Temperature: -40°C~55°C
 Humidity: 10%~95%
LIFETIME: More than 50,000 hrs


FEATURES

WARRANTY: 5 Years
POWER SAVING: At least 60% Energy Saving
LONG LIFE: LEDs last for more than 50,000hrs
 (12hrs/day for about 10years)
HEAT DISSIPATION: Patented heat dissipation design,
 achieve optimum efficiency
MODULAR DESIGN: Can replace the module directly,
 if you want another kind of application
LAB TESTED: National listing lab test in
 accordance with IES Standards
SOLID-STATE: High-Shock and High-Vibration Resistant
INSTANT-ON: Light turn on right away without delay in Re-Strike
HIGH CRI: 75 CRI enhances all original colors
APPLICATION: Rural Road, Commercial Square, Garden, Villa

AST51911~12



Item No.	Wattage	Led Qty (Pcs)	Initial Luminous Flux (4000K)	CCT	Driver Efficiency	CR	Power Factor	Warranty (Years)	Module Code	Module Picture
AST51911	35	16	3699	4000±300K	>97%	>71	0.96	5	XST	
AST51912	70	32	7042	4000±300K	>97%	>75	0.96	5	AST	
AJAS191	40	18	4162	4000±300K	>97%	>75	0.96	5	AJA	
AUT5191	2850	1321	27704855	4000±300K	>97%	>75	0.96	5	AUT	

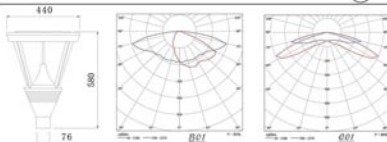

Ordering info

Example AST51911 Garden Light

Ordering Code AST51911, 35W, A01, 40, SG, V22, 1

1 2 3 4 5 6

1. Wattage	AST51911: 35W AST51912: 70W AJAS191: 40W	AUT5191: 25W AUT5191: 50W
2. Light Distribution	A01	C01 D01
3. Color Temp	30: 3000±300K 40: 4000±300K 50: 5000±300K	
4. Housing Color	GY: Dark Grey SG: Silver Grey BK: Black DG: Dark Green WH: White	
5. Input Voltage	V22: AC 220-240 V V27: AC 100-277V	
6. Philips Driver	0: Without 1: With	



AUA5191

40W



AST51912

70W



TECHNICAL SPECIFICATIONS


SERIES: AST53611~
MATERIAL: Aluminum body+PC
INPUT VOLTAGE: 120-277VAC
WORKING CURRENT: 700MA
POWER FACTOR: 0.96
LED QTY: 16~32pcs of LEDs
TOTAL CONSUMPTION: 35W-70W
EFFICACY: >97lm/w
LED: Cree XPG2
BEAM PATTERN: A01, B01, C01, D01
COLOR RENDERING INDEX: More than 75
PIPE MOUNTING DIA: 1 in. (26mm)
IP RATING: IP65
WORKING CONDITION: Temperature: -40°C~55°C
 Humidity: 10%~95%
LIFETIME: More than 50,000 hrs

FEATURES

WARRANTY: 5 Years
POWER SAVING: At least 60% Energy Saving
LONG LIFE: LEDs last for more than 50,000hrs
 (12hrs/day for about 10years)
HEAT DISSIPATION: Patented heat dissipation design,
 achieve optimum efficiency
MODULAR DESIGN: Can replace the module directly,
 if you want another kind of application
LAB TESTED: National testing lab test
 in accordance with IES Standards
SOLID-STATE: High-Shock and High-Vibration Resistant
INSTANT-ON: Light turn on right away, without delay in Re-Strike
HIGH CRI: 75 CRI enhances all original colors
APPLICATION: Rural Road, Commercial Square, Garden, Villa

AST53611~12

Item No.	Wattage	Led Qty (Pcs)	Initial Luminaire Flux (lm)	CCT	Driver Efficiency	CRI	Power Factor	Warranty (Years)	Module Code	Module Picture
AST53611	35	16	3699	4000±300K	>97%	>75	0.96	5	AST	
AST53612	70	32	7042	4000±300K	>97%	>75	0.96	5	AST	
AUT5361	2850	1201	2770±855	4000±300K	>97%	>75	0.96	5	AUT	
AUA5361	40	18	4162	4000±300K	>97%	>75	0.96	5	AUA	
AUS53612	35	16	3699	4000±300K	>97%	>75	0.96	5	AUS	
AUS53613	55	24	5528	4000±300K	>97%	>75	0.96	5	AUS	

**Ordering info**

Example: AUA5361 Garden Pendant Light
 Ordering Code: AUA5361 50W, D01, 40, SG, V22, 1, 01

1. Wattage	AUT5361: 25W	AST53611: 35W	AUS5363: 55W		
	AUT5361: 50W	AST53612: 70W			
	AUA5361: 40W	AUS5362: 35W			
2. Light Distribution	A01	B01	C01	D01	
3. Color Temp	30: 3000±300K 40: 4000±300K 50: 5000±300K				
4. Housing Color	GY: Dark Grey	SG: Silver Grey	BK: Black	DG: Dark Green	WH: White
5. Input Voltage	V22: AC 220-240 V V27: AC 100-277V				
6. Philips Driver	0: Without 1: With				
7. Top Type	01: Type01 02: Type02 03: Type03				

LED Garden Light Series**AUA5361**

With diffuser
50W

**AUA5361****40W**

TECHNICAL SPECIFICATIONS


SERIES: AUA5471
MATERIAL: Aluminium body+PC
INPUT VOLTAGE: 120-277VAC
WORKING CURRENT: 700MA
POWER FACTOR: 0.95
LED Q'TY: 18pcs of LEDs
TOTAL CONSUMPTION: 40W
EFFICACY: >97lm/w
LED: Cree XPG2
BEAM PATTERN: C01,B01,A01
COLOR RENDERING INDEX: More than 75
PIPE MOUNTING DIA.: 1 in. (26mm)
IP RATING: IP65
WORKING CONDITION: Temperature: -40°C~55°C
 Humidity: 10%~95%
LIFETIME: More than 50,000 hrs

FEATURES

WARRANTY: 5 Years
POWER SAVING: At least 60% Energy Saving
LONG LIFE: LEDs last for more than 50,000hrs
 (12hrs/day for about 15years)
HEAT DISSIPATION: Patented heat dissipation design,
 achieve optimum efficiency
MODULAR DESIGN: Can replace the module directly,
 if you want another kind of application
LAB TESTED: National listing lab test in
 accordance with IES Standards
SOLID STATE: High-Shock and High-Vibration Resistant
INSTANT ON: Light turn on right away, without delay in Re-Strike
HIGH CRI: 75 CRI enhances all original colors
APPLICATION: Rural Road, Commercial Square, Garden, Villa

AST54711~12

Item No.	Wattage	LED Qty (Pcs)	Initial Luminous Flux (4000K)	CCT	Driver Efficiency	CRI	Power Factor	Warranty (Years)	Module Code	Module Picture
AST54711	35	18	3699	4000±300K	>97%	>75	0.96	5	AST	
AST54712	70	32	7042	4000±300K	>97%	>75	0.96	5	AST	
AUA5471	40	18	4182	4000±300K	>97%	>75	0.96	5	AUA	
AUS54712	35	18	3699	4000±300K	>97%	>75	0.96	5	AUS	
AUS54713	55	24	5528	4000±300K	>97%	>75	0.96	5	AUS	

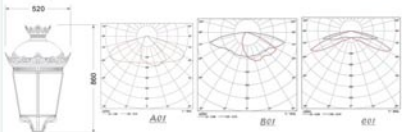**Ordering info**

Example: AST54711 Garden Light
 Ordering Code: **AST54711**, 35W, A01, 40, SG, V22, 1

1. Wattage

AST54711 35W AUS54712 35W
 AST54712 70W AUS54713 55W
 AUA5471: 40W

2. Light Distribution

A01 B01 C01

3. Color Temp.

30: 3000±300K 40: 4000±300K 50: 5000±300K

4. Housing Color

GY: Dark Grey SG: Silver Grey BK: Black DG: Dark Green WH: White

5. Input Voltage

V22: AC 220-240 V V27: AC 100-277V

6. Philips Driver

0: Without 1: With

LED Garden Light Series**AUA5471****40W**

With Clear diffuser

**AUS54712****35W**

With Clear diffuser

**35W**
AST54711

With Prismatic diffuser




TECHNICAL SPECIFICATIONS


SERIE: AUA5661
MATERIAL: Aluminum body+PC
INPUT VOLTAGE: 120-277VAC
WORKING CURRENT: 700MA
POWER FACTOR: 0.96
LED QTY: 18pcs of LEDs
TOTAL CONSUMPTION: 40W
EFFICACY: >97lm/w
LED: Cree XPG2
BEAM PATTERN: C01
COLOR RENDERING INDEX: More than 75
PIPE MOUNTING DIA: 76mm
IP RATING: IP65
WORKING CONDITION: Temperature: -40°C~55°C
 Humidity: 10%~95%
LIFETIME: More than 50,000 hrs

FEATURES

WARRANTY: 3 Years
POWER SAVING: At least 60% Energy Saving
LONG LIFE: LEDs last for more than 50,000hrs
 (12hrs/day for about 10years)
HEAT DISSIPATION: Patented heat dissipation design,
 achieve optimum efficiency
MODULAR DESIGN: Can replace the module directly,
 if you want another kind of application
LAB TESTED: National testing lab test
 in accordance with IES Standards
SOLID-STATE: High-Shock and High-Vibration Resistant
INSTANT-ON: Light turn on right away, without delay in Re-Strike
HIGH CRI: 75 CRI enhances all original colors
APPLICATION: Rural Road, Commercial Square, Garden, Villa

AST56611~12

Item No.	Wattage	LED Qty (Pcs)	Initial Luminous Flux (lm)	CCT	Driver Efficiency	CRI	Power Factor	Warranty (Years)	Module Code	Module Picture
AUA5661	40	18	4162	4000±300K	>97%	>75	0.96	3	AUA	



C01

Ordering info

Example AUA5661 Garden Light
 Ordering Code AUA5661_40W_C01_40_SG_V22_1

1 2 3 4 5 6

1. Wattage

AUA5661: 40W

2. Light Distribution

C01

3. Color Temp

30: 3000±300K 40: 4000±300K 50: 5000±300K

4. Housing Color

GY: Dark Grey SG: Silver Grey BK: Black DG: Dark Green WH: White

5. Input Voltage

V22: AC 220-240 V V27: AC 100-277V

6. Philips Driver

0: Without 1: With

LED Garden Light Series



AUA5661

40W



TECHNICAL SPECIFICATIONS


SERIES: AST56711-
MATERIAL: Aluminium body+PC
INPUT VOLTAGE: 120-277VAC
WORKING CURRENT: 700MA
POWER FACTOR: 0.96
LED QTY: 16-48pcs of LEDs
TOTAL CONSUMPTION: 35W-105W
EFFICACY: >97lm/w
LED: Cree XPG2
BEAM PATTERN: A01, B01, C01
COLOR RENDERING INDEX: More than 75
PIPE MOUNTING DIA: 1 in. (26mm)
IP RATING: IP65
WORKING CONDITION: Temperature: -40°C ~ 55°C
 Humidity: 10% ~ 95%
LIFETIME: More than 50,000 hrs

FEATURES

WARRANTY: 5 Years
POWER SAVING: At least 60% Energy Saving
LONG LIFE: LEDs last for more than 50,000hrs
 (12hrs/day for about 10years)
HEAT DISSIPATION: Patented heat dissipation design,
 achieve optimum efficiency
MODULAR DESIGN: Can replace the module directly,
 if you want another kind of application
LAB TESTED: National listing lab test in
 accordance with IES Standards
SOLID-STATE: High-Shock and High-Vibration Resistant
INSTANT-ON: Light turn on right away, without delay in Re-Strike
HIGH CRI: 75 CRI enhances all original colors
APPLICATION: Rural Road, Commercial Square, Garden, Villa

AUS56712~3

Item No.	Wattage	Led Qty	Initial Luminous Flux (lm)	CCT (4000K)	Driver Efficiency	CRI	Power Factor	Warranty (Years)	Module Code	Module Picture
AST56711	35	16	3699	4000±300K	>97%	>75	0.96	5	A01	
AST56712	70	32	7042	4000±300K	>97%	>75	0.96	5	A02	
AUA5671	40	16	4162	4000±300K	>97%	>75	0.96	5	A1A	
AUS56712	35	16	3699	4000±300K	>97%	>75	0.96	5	AUG	
AUS56713	55	24	5528	4000±300K	>97%	>75	0.96	5	AUS	

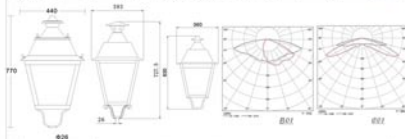**Ordering info**

Example: AST56711 Garden Light
 Ordering Code: AST56711_35W_A01_40_SG_V22_1
 1 2 3 4 5 6

1. Wattage	AST56711 35W	AUS56712 35W
	AST56712 70W	AUS56713 55W
	AUA5671 40W	
2. Light Distribution	A01	B01 C01
3. Color Temp	30 3000±300K	40 4000±300K 50 5000±300K
4. Housing Color	GY: Dark Grey	SG: Silver Grey BK: Black DG: Dark Green WH: White
5. Input Voltage	V22: AC 220-240 V V27: AC 100-277V	
6. Philips Driver	0: Without 1: With	

LED Garden Light Series**AUS5671L****55W****AUS5671M****35W****AUS5671s****25W****AUA5671L****40W**

Http://www.austarlux.com



TECHNICAL SPECIFICATIONS

SERIES: AST57011~
MATERIAL: Aluminum body+PC
INPUT VOLTAGE: 120-277VAC
WORKING CURRENT: 700MA
POWER FACTOR: 0.96
LED QTY: 16~32pcs of LEDs
TOTAL CONSUMPTION: 35W-70W
EFFICACY: >97lm/w
LED: Cree XPG2
BEAM PATTERN: A01, C01
COLOR RENDERING INDEX: More than 75
PIPE MOUNTING DIA: 60mm
IP RATING: IP65
WORKING CONDITION: Temperature: -40°C~55°C
 Humidity: 10%~95%
LIFETIME: More than 50,000 hrs


FEATURES

WARRANTY: 5 Years
POWER SAVING: At least 60% Energy Saving
LONG LIFE: LEDs last for more than 50,000hrs
 (12hrs/day for about 10years)
HEAT DISSIPATION: Patented heat dissipation design,
 achieve optimum efficiency
MODULAR DESIGN: Can replace the module directly,
 if you want another kind of application
LAB TESTED: National testing lab test in
 accordance with IES Standards
SOLID-STATE: High-Shock and High-Vibration Resistant
INSTANT-ON: Light turn on right away, without delay in Re-Strike
HIGH CRI: 75 CRI enhances all original colors
APPLICATION: Rural Road, Commercial Square, Garden, Villa

AST57011~12



Item No.	Wattage	LED Qty	Initial Luminous Flux (4000K)	CCT	Driver Efficiency	CRI	Power Factor	Warranty (Years)	Module Code	Module Picture
AST57011	35	16	3699	4000±300K	>97%	>75	0.96	5	AST	
AST57012	70	32	7042	4000±300K	>97%	>75	0.96	5	AST	
AUA5701	40	18	4162	4000±300K	>97%	>75	0.96	5	AUA	
AUS57012	35	16	3699	6000±300K	>97%	>75	0.96	5	AUS	
AUS57013	55	34	5528	4000±300K	>97%	>75	0.96	5	AUS	



Ordering info

Example: AST57011 Garden Light
 Ordering Code: AST57011_35W_A01_40_SG_V22_1
 1 2 3 4 5 6

1. Wattage	AST57011 35W	AUS57012 35W
	AST57012 70W	AUS57013 55W
	AUA5701 40W	
2. Light Distribution	A01	B01 C01
3. Color Temp	30: 3000±300K	40: 4000±300K
	50: 5000±300K	
4. Housing Color	GY: Dark Grey	SG: Silver Grey
	BK: Black	DG: Dark Green
	WH: White	
5. Input Voltage	V22: AC 220-240 V V27: AC 100-277V	
6. Philips Driver	0: Without 1: With	

LED Garden Light Series

LED**AST57011****35W****70W****AST57012**

TECHNICAL SPECIFICATIONS

SERIE: AUA5831
MATERIAL: Aluminum body+PC
INPUT VOLTAGE: 120-277VAC
WORKING CURRENT: 700MA
POWER FACTOR: 0.96
LED Q'TY: 18pcs of LEDs
TOTAL CONSUMPTION: 40W
EFFICACY: >97lm/w
LED: Cree XPG2
BEAM PATTERN: C01,A01,B01
COLOR RENDERING INDEX: More than 75
PIPE MOUNTING DIA: 26mm,40mm
IP RATING: IP65
WORKING CONDITION: Temperature: -40°C~55°C
 Humidity: 10%~95%
LIFETIME: More than 50,000 hrs


FEATURES

WARRANTY: 5 Years
POWER SAVING: At least 60% Energy Saving
LONG LIFE: LEDs last for more than 50,000hrs
 (12hrs/day for about 10years)
HEAT DISSIPATION: Patented heat dissipation design,
 achieve optimum efficiency
MODULAR DESIGN: Can replace the module directly,
 if you want another kind of application
LAB TESTED: National testing lab test in
 accordance with IES Standards
SOLID-STATE: High-Shock and High-Vibration Resistant
INSTANT-ON: Light turn on right away, without delay in Re-Strike
HIGH CRI: 75 CRI enhances all original colors
APPLICATION: Rural Road, Commercial Square, Garden, Villa

AST58311~12

CE RoHS IP65

Item No.	Wattage	Led Qty (Pcs)	Initial Lumen/hrs Flux (4000K)	CCT	Driver Efficiency (%)	CRI	Power Factor	Warranty (Years)	Module Code	Module Picture
AST58311	35	18	3699	4000x300K	>97%	>75	0.96	5	AST	
AST58312	70	32	7042	4000x300K	>97%	>75	0.96	5	AST	
AUA5831	40	18	4182	4000x300K	>97%	>75	0.96	5	AUA	
AUS58312	35	16	3699	4000x300K	>97%	>75	0.96	5	AUS	
AUS58313	55	24	5528	4000x300K	>97%	>75	0.96	5	AUG	

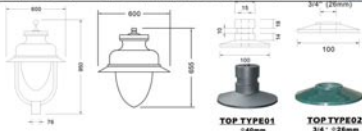

Ordering info	Example: AST58311 Garden Light Ordering Code: AST58311_35W_A01_40_SG_V22_1					
	1	2	3	4	5	6
1. Wattage	AST58311 35W	AUS58312 35W	AST58312 70W	AUS58313 55W		
2. Light Distribution	A01	B01	C01			
3. Color Temp	30: 3000±300K 40: 4000±300K 50: 5000±300K					
4. Housing Color	GY: Dark Grey SG: Silver Grey BK: Black DG: Dark Green WH: White					
5. Input Voltage	V22: AC 220-240 V V27: AC 100-277V					
6. Philips Driver	0: Without 1: With					

LED Garden Light Series



AUA5831

40W

With diffuser



AUS58312

With diffuser

35W



40W

35W

AST5831A1

With diffuser



AST5831B1

With diffuser

35W



TECHNICAL SPECIFICATIONS

SERIES: AUA5861
MATERIAL: Aluminium body+PC
INPUT VOLTAGE: 120-277VAC
WORKING CURRENT: 700mA
POWER FACTOR: 0.96
LED QTY: 16pcs of LEDs
TOTAL CONSUMPTION: 40W
EFFICACY: >97lm/w
LED: Cree XPG2
BEAM PATTERN: C01
COLOR RENDERING INDEX: More than 75
PIPE MOUNTING DIA: 26mm
IP RATING: IP65
WORKING CONDITION: Temperature: -40°C~55°C
 Humidity: 10%~95%
LIFETIME: More than 50,000 hrs


FEATURES

WARRANTY: 5 Years
POWER SAVING: At least 60% Energy Saving
LONG LIFE: LEDs last for more than 50,000hrs
 (12hrs/day for about 10years)
HEAT DISSIPATION: Patented heat dissipation design,
 achieve optimum efficiency
MODULAR DESIGN: Can replace the module directly,
 if you want another kind of application
LAB TESTED: National testing lab test in
 accordance with IES Standards
SOLID-STATE: High-Shock and High-Vibration Resistant
INSTANT-ON: Light turn on right away, without delay in Re-Strike
HIGH CRI: 75 CRI enhances all original colors
APPLICATION: Rural Road, Commercial Square, Garden, Villa

AUA5861

CE GS IP65

Item No.	Wattage	Led Qty (Pcs)	Initial Luminous Flux (4000K)	CCT	Driver Efficiency	CRI	Power Factor	Warranty (Years)	Module Code	Module Picture
AST58611	35	16	3699	4000±300K	>97%	>75	0.96	5	A01	
AST58612	70	32	7042	4000±300K	>97%	>75	0.96	5	A02	
ALIA5861	40	18	4482	4000±300K	>97%	>75	0.96	5	ALIA	
AUS58612	35	16	3699	4000±300K	79%	>75	0.96	5	AUS	
AUS58613	55	24	5528	4000±300K	>97%	>75	0.96	5	AUS	



Ordering info

Example AST58611 Garden Light
 Ordering Code: AST58611_35W_A01_40_SG_V22_1
 1 2 3 4 5 6

1.Wattage

AST58611 35W AUS58612 35W
 AST58612 70W AUS58613 55W
 ALIA5861: 40W

2 Light Distribution

A01 B01 C01

3 Color Temp

30: 3000±300K 40: 4000±300K 50: 5000±300K

4 Housing Color

GY: Dark Grey SG: Silver Grey BK: Black DG: Dark Green WH: White

5 Input Voltage

V22: AC 220-240 V V27: AC 100-277V

6 Philips Driver

0 Without 1 With

LED Garden Light Series



AUA5861

40W

With diffuser





TECHNICAL SPECIFICATIONS

SERIES: AST59411-
MATERIAL: Aluminium body+PC
INPUT VOLTAGE: 120-277VAC
WORKING CURRENT: 700MA
POWER FACTOR: 0.96
LED QTY: 16-32pcs of LEDs
TOTAL CONSUMPTION: 35W-70W
EFFICACY: >97lm/w
LED: Cree XPQ2
BEAM PATTERN: A01, A02, A03
COLOR RENDERING INDEX: More than 75
PIPE MOUNTING DIA: 76mm
IP RATING: IP65
WORKING CONDITION: Temperature: -40°C~55°C
 Humidity: 10%~95%
LIFETIME: More than 50,000 hrs


FEATURES

WARRANTY: 5 Years
POWER SAVING: At least 80% Energy Saving
LONG LIFE: LEDs last for more than 50,000hrs
 (12hrs/day for about 10years)
HEAT DISSIPATION: Patented heat dissipation design,
 achieve optimum efficiency
MODULAR DESIGN: Can replace the module directly,
 if you want another kind of application
LAB TESTED: National listing lab test in
 accordance with IES Standards
SOLID-STATE: High-Shock and High-Vibration Resistant
INSTANT-ON: Light turn on right away, without delay in Re-Strike
HIGH CRI: 75 CRI enhances all original colors
APPLICATION: Rural Road, Commercial Square, Garden, Villa

AST59411~12



Item No.	Wattage	Module Qty	Initial Luminous Flux (lm)	CGT	Driver Efficiency	Driver	Pos/Ctr	Weight	Col Size	Lamp Dimension(mm)
AST59411	35	1	3500	4000±300K	>97%	INCL/EXC	1	30	45 5x15 5x85	1440x1440x450
AST59412	70	2	7042	4000±300K	>97%	INCL/EXC	1	11	61 5x45 5x85	1440x1440x450

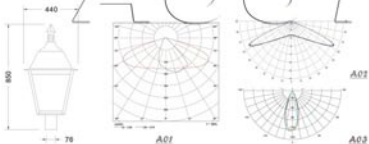

Ordering info	Example: AST59411 Garden Light Ordering Code: AST59411, 59411, A01, 40, SG, Y22, 1, 0		
1. Wattage	AST59411: 35W AST59412: 70W		
2. Light Distribution	A01	A02	A03
3. Color Temp	30: 3000±300K 40: 4000±300K 50: 5000±300K		
4. Housing Color	GY: Dark Grey SG: Silver Grey BK: Black DG: Dark Green		
5. Input Voltage	V22: AC 220-240 V V27: AC 100-277V		
6. Philips Driver	0: Without 1: With		
7. Photocell	0: Without 1: With		



AST59411

35W



70W

TECHNICAL SPECIFICATIONS






SERIES: AUS60012
MATERIAL: Aluminum body+PC
INPUT VOLTAGE: 120-277VAC
WORKING CURRENT: 700MA
POWER FACTOR: 0.96
LED QTY: 16pcs of LEDs
TOTAL CONSUMPTION: 35W
EFFICACY: >97lm/w
LED: Cree XPG2
BEAM PATTERN: C01,B01
COLOR RENDERING INDEX: More than 75
PIPE MOUNTING DIA: 1 in. (26mm)
IP RATING: IP65
WORKING CONDITION: Temperature: -40°C~55°C
 Humidity: 10%~95%
LIFETIME: More than 50,000 hrs

FEATURES


WARRANTY: 5 Years
POWER SAVING: At least 60% Energy Saving
LONG LIFE: LEDs last for more than 50,000hrs
 (12hrs/day for about 10years)
HEAT DISSIPATION: Patented heat dissipation design,
 achieve optimum efficiency
MODULAR DESIGN: Can replace the module directly,
 if you want another kind of application
LAB TESTED: National testing lab test
 in accordance with IES Standards
SOLID-STATE: High-Shock and High-Vibration Resistant
INSTANT-ON: Light turn on right away, without delay in Re-Strike
HIGH CRI: 75 CRI enhances all original colors
APPLICATION: Rural Road, Commercial Square, Garden, Villa

AUS60012

CE RoHS IP65

Item No.	Wattage	Led Qty (Pcs)	Initial Luminous Flux (lm)	CCT	Driver Efficiency	CRI	Power Factor	Warranty (Years)	Module Code	Module Picture
AST60011	35	16	3699	4000±300K	>97%	>75	0.96	5	AST	
AST60012	70	32	7042	4000±300K	>97%	>75	0.96	5	AST	
ALJA6001	40	16	4182	4000±300K	>97%	>75	0.96	5	ALJA	
AUS60012	35	16	3699	4000±300K	>97%	>75	0.96	5	AUS	
AUS60013	55	24	5528	4000±300K	>97%	>75	0.96	5	AUS	

3/4" (26mm)

**Ordering info**

Example AST60011 Garden Light
 Ordering Code: **AST60011_35W_A01_40_SG_V22_1**

1 2 3 4 5 6

1. Wattage

AST60011 35W AUS60012 35W
 AST60012 70W AUS60013 55W
 ALJA6001: 40W

2. Light Distribution

A01 B01 C01

3. Color Temp

30: 3000±300K 40: 4000±300K 50: 5000±300K

4. Housing Color

GY: Dark Grey SG: Silver Grey BK: Black DG: Dark Green WH: White

5. Input Voltage

V22: AC 220-240 V V27: AC 100-277V

6. Philips Driver

0: Without 1: With

LED Garden Light Series**AUS60012****35W****AST6001s1****35W**

Http://www.austarlux.com



57

56



Http://www.ChinaAustar.com

AUSTAR


TECHNICAL SPECIFICATIONS


SERIE: AUA6021
MATERIAL: Aluminum body+PC
INPUT VOLTAGE: 120-277VAC
WORKING CURRENT: 700MA
POWER FACTOR: 0.96
LED QTY: 18pcs of LEDs
TOTAL CONSUMPTION: 40W
EFFICACY: >97lm/w
LED: Cree XPG2
BEAM PATTERN: C01
COLOR RENDERING INDEX: More than 75
PIPE MOUNTING DIA: 76mm
IP RATING: IP65
WORKING CONDITION: Temperature: -40°C~55°C
 Humidity: 10%~95%
LIFETIME: More than 50,000 hrs

FEATURES

WARRANTY: 5 Years
POWER SAVING: At least 60% Energy Saving
LONG LIFE: LEDs last for more than 50,000hrs
 (12hrs/day for about 10years)
HEAT DISSIPATION: Patented heat dissipation design,
 achieve optimum efficiency
MODULAR DESIGN: Can replace the module directly,
 if you want another kind of application
LAB TESTED: National testing lab test
 in accordance with IES Standards
SOLID-STATE: High-Shock and High-Vibration Resistant
INSTANT-ON: Light turn on right away, without delay in Re-Strike
HIGH CRI: 75 CRI enhances all original colors
APPLICATION: Rural Road, Commercial Square, Garden, Villa

AUA6021

Item No.	Wattage	Led Qty (Pcs)	Initial Luminous Flux (4000K)	CCT	Driver Efficiency	CRI	Power Factor	Warranty (Years)	Module Code	Module Picture
AUA6021	40	18	4162	4000±300K	>97%	>75	0.96		AUA	



Ordering info	Example: AUA6021 Garden Light Ordering Code: AUA6021_40W_C01_40_SG_V22_1
1. Wattage	AUA6021_40W
2. Light Distribution	C01
3. Color Temp	30: 3000±300K 40: 4000±300K 50: 5000±300K
4. Housing Color	GY: Dark Grey SG: Silver Grey BK: Black DG: Dark Green WH: White
5. Input Voltage	V22: AC 220-240 V V27: AC 100-277V
6. Philips Driver	0: Without 1: With

LED Garden Light Series



AUA6021

40W



TECHNICAL SPECIFICATIONS

SERIES: AST60511~
MATERIAL: Aluminium body+PC
INPUT VOLTAGE: 120-277VAC
WORKING CURRENT: 700MA
POWER FACTOR: 0.96
LED QTY: 16~48pcs of LEDs
TOTAL CONSUMPTION: 35W-105W
EFFICIACY: >97lm/w
LED: Cree XPG2
BEAM PATTERN: A01, A02, A03
COLOR RENDERING INDEX: More than 75
PIPE MOUNTING DIA: 1 in. (26mm)
IP RATING: IP65
WORKING CONDITION: Temperature: -40°C~55°C
 Humidity: 10%~95%
LIFETIME: More than 50,000 hrs



FEATURES

WARRANTY: 5 Years
POWER SAVING: At least 60% Energy Saving
LONG LIFE: LEDs last for more than 50,000hrs
 (12hrs/day for about 10years)
HEAT DISSIPATION: Patented heat dissipation design,
 achieve optimum efficiency
MODULAR DESIGN: Can replace the module directly,
 if you want another kind of application
LAB TESTED: National testing lab test in
 accordance with IES Standards
SOLID-STATE: High-Shock and High-Vibration Resistant
INSTANT-ON: Light turn on right away, without delay in Re-Strike
HIGH CRI: 75 CRI enhances all original colors
APPLICATION: Rural Road, Commercial Square, Garden, Villa

AST60511~13



Item No.	Wattage	Module Qty	Initial Luminous Flux (lm)	CCT	Driver Efficiency	Driver	Pos/Ctr	Weight	Ch Size	Lamp Dimension(mm)
AST60511	35	1	3000	4000±300K	>97%	INCLUDE	1	14	81x81x100	L800xW800xH1000
AST60512	70	2	7042	4000±300K	>97%	INCLUDE	1	16	81x81x100	L800xW800xH1000
AST60513	105W	3	10961	4000±300K	>97%	INCLUDE	1	16	81x81x100	L800xW800xH1000
AST60711	35	1	3000	4000±300K	>97%	INCLUDE	1	12.5	81x81x100	L800xW800xH1000
AST60712	70	2	7042	4000±300K	>97%	INCLUDE	1	13.5	81x81x100	L800xW800xH1000
AST60713	105	3	10961	4000±300K	>97%	INCLUDE	1	14.5	81x81x100	L800xW800xH1000



A01

A02

Ordering info

Example AST60512 Garden Light
 Ordering Code: AST60512, 60512, A01, 40, SG, Y22, 1, 0
 1 2 3 4 5 6 7

1. Wattage

AST60511: 35W AST60711: 35W
 AST60512: 70W AST60712: 70W
 AST60513: 105W AST60713: 105W

2. Light Distribution

A01 A02 A03

3. Color Temp

30: 3000±300K 40: 4000±300K 50: 5000±300K

4. Housing Color

GY: Dark Grey SG: Silver Grey BK: Black DG: Dark Green

5. Input Voltage

V22: AC 220-240 V V27: AC 100-277V

6. Philips Driver

0: Without 1: With

7. Protocol

0: Without 1: With

LED Garden Light Series



AST60512

W/O diffuser

70W



70W

AST60512

With diffuser



70W

AST60712

With diffuser



70W

AST60712

W/O diffuser

TECHNICAL SPECIFICATIONS

SERIES: AST60611~
MATERIAL: Aluminum body+PC
INPUT VOLTAGE: 120-277VAC
WORKING CURRENT: 700MA
POWER FACTOR: 0.96
LED QTY: 16~48pcs of LEDs
TOTAL CONSUMPTION: 35W-105W
EFFICACY: >97lm/w
LED: Cree XPG2
BEAM PATTERN: A01,A02,A03
COLOR RENDERING INDEX: More than 75
PIPE MOUNTING DIA: 1 in. (26mm)
IP RATING: IP65
WORKING CONDITION: Temperature: -40°C~55°C
 Humidity: 10%~95%
LIFETIME: More than 50,000 hrs


FEATURES

WARRANTY: 5 Years
POWER SAVING: At least 60% Energy Saving
LONG LIFE: LEDs last for more than 50,000hrs
 (12hrs/day for about 10years)
HEAT DISSIPATION: Patented heat dissipation design,
 achieve optimum efficiency
MODULAR DESIGN: Can replace the module directly,
 if you want another kind of application
LAB TESTED: National testing lab test
 in accordance with IES Standards
SOLID-STATE: High-Shock and High-Vibration Resistant
INSTANT-ON: Light turn on right away, without delay in Re-Strike
HIGH CRI: 75 CRI enhances all original colors
APPLICATION: Rural Road, Commercial Square, Garden, Villa

AST60611~13



Item No.	Wattage	Module Qty	Initial/Luminous Flux (4000K)	CCT	Driver Efficiency	Driver	Pcs/Cr	Weight	Qty Size	Lamp Dimension(mm)
AST60611	35	1	2729	4000±300K	>97%	INCLUDE	1	10	65x65x1002	L650xW650xH1000
AST60612	70	2	7042	4000±300K	>97%	INCLUDE	1	14	65x65x1002	L650xW650xH1000
AST60613	105	3	10961	4000±300K	>97%	INCLUDE	1	12	65x65x1002	L650xW650xH1000
AST60611	35	1	3689	4000±300K	>97%	INCLUDE	1	10	65x65x1002	L650xW650xH1000
AST60612	70	2	7042	4000±300K	>97%	INCLUDE	1	11	65x65x1002	L650xW650xH1000
AST60613	105	3	10961	4000±300K	>97%	INCLUDE	1	12	65x65x1002	L650xW650xH1000

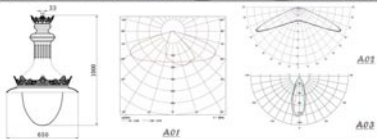

Ordering info

Example AST60612 Garden Light
 Ordering Code: AST60612, 00612, A01, 40, SG, Y22, 1, 0
 1 2 3 4 5 6 7

1. Wattage	AST60611: 35W	AST60611: 35W
	AST60612: 70W	AST60612: 70W
	AST60613: 105W	AST60613: 105W
2. Light Distribution	A01	A03
3. Color Temp	30: 3000±300K	40: 4000±300K
	50: 5000±300K	
4. Housing Color	GY: Dark Grey	SG: Silver Grey
	BK: Black	DG: Dark Green
5. Input Voltage	V22: AC 220-240 V V27: AC 100-277V	
6. Philips Driver	0 Without 1 With	
7. Protocol	0 Without 1 With	

LED Garden Light Series



AST60612

70W



AST60612

With diffuser



AST60812

With diffuser



AST60812

W/O diffuser

TECHNICAL SPECIFICATIONS

SERIES: AST115F1~
MATERIAL: Aluminium body+PC
INPUT VOLTAGE: 120-277VAC
WORKING CURRENT: 700MA
POWER FACTOR: 0.90
LED QTY: 16~48pcs of LEDs
TOTAL CONSUMPTION: 35W-105W
EFFICACY: >97lm/w
LED: Cree XPG2
BEAM PATTERN: A01,A02,A03
COLOR RENDERING INDEX: More than 75
PIPE MOUNTING DIA: 1 in. (26mm)
IP RATING: IP65
WORKING CONDITION: Temperature: -40°C~55°C
 Humidity: 10%~95%
LIFETIME: More than 50,000 hrs

FEATURES

WARRANTY: 5 Years
POWER SAVING: At least 60% Energy Saving
LONG LIFE: LEDs last for more than 50,000hrs
 (12hrs/day for about 10years)
HEAT DISSIPATION: Patented heat dissipation design,
 achieve optimum efficiency
MODULAR DESIGN: Can replace the module directly,
 if you want another kind of application
LAB TESTED: National testing lab test in
 accordance with IES Standards
SOLID-STATE: High-Shock and High-Vibration Resistant
INSTANT-ON: Light turn on right away, without delay in Re-Strike
HIGH CRI: 75 CRI enhances all original colors
APPLICATION: Rural Road, Commercial Square, Garden, Villa

AST115F1~F3



Item No.	Wattage	Module Qty	Initial Luminous Flux (lm)	CCT	Driver Efficiency	Driver Pcs/Ct	Weight	Ctj Size	Lamp Diameter (mm)
AST115F1	35	1	3609	4000±300K	>97%	INCLUDE	1 10	61x61x70	1800~1900~1960
AST115F2	70	2	7042	4000±300K	>97%	INCLUDE	1 14	61x61x70	1800~1900~1960
AST115F3	105	3	10661	4000±300K	>97%	INCLUDE	1 12	61x61x70	1800~1900~1960
AST115G1	35	1	3609	4000±300K	>97%	INCLUDE	1 10	61x61x73	1800~1900~1960
AST115G2	70	2	7042	4000±300K	>97%	INCLUDE	1 11	61x61x73	1800~1900~1960
AST115G3	105	3	10661	4000±300K	>97%	INCLUDE	1 12	61x61x73	1800~1900~1960



Ordering info

Example AST115F2 Garden Light

Ordering Code: AST115F2, 115F2, A01, 40, SG, V22, 1, 0

1 2 3 4 5 6 7

1 Wattage

AST115F1: 35W AST115G1: 35W
 AST115F2: 70W AST115G2: 70W
 AST115F3: 105W AST115G3: 105W

2 Light Distribution

A01 A02 A03

3 Color Temp

30: 3000±300K 40: 4000±300K 50: 5000±300K

4 Housing Color

GY: Dark Grey SG: Silver Grey BK: Black DG: Dark Green

5 Input Voltage

V22: AC 220-240 V V27: AC 100-277V

6 Philips Driver

0 Without 1 With

7 Photocell

0 Without 1 With

LED Garden Light Series

LED



AST115F2
70W

With diffuser



70W

AST115F2

W/O diffuser



105W

AST115G3

With diffuser



70W

AST115H2

With diffuser

TECHNICAL SPECIFICATIONS

SERIES: TAR5671
MATERIAL: Aluminum body+PC
INPUT VOLTAGE: 120-277VAC
WORKING CURRENT: 530MA
POWER FACTOR: 0.96
LED QTY: 30pcs of LEDs
TOTAL CONSUMPTION: 50W
EFFICACY: >97 lm/w
LED: Cree XP02
BEAM PATTERN: TP1
COLOR RENDERING INDEX: More than 75
PIPE MOUNTING DIA: 1 in. (26mm)
IP RATING: IP65
WORKING CONDITION: Temperature: -40°C~55°C
 Humidity: 10%-95%
LIFETIME: More than 50,000 hrs

FEATURES

WARRANTY: 5 Years
POWER SAVING: At least 60% Energy Saving
LONG LIFE: LEDs last for more than 50,000hrs
 (12hrs/day for about 10years)
HEAT DISSIPATION: Patented heat dissipation design,
 achieve optimum efficiency
MODULAR DESIGN: Can replace the module directly,
 if you want another kind of application
LAB TESTED: National testing lab test in
 accordance with IES Standards
SOLID-STATE: High-Shock and High-Vibration Resistant
INSTANT-ON: Light turn on right away, without delay in Re-Strike
HIGH CRI: 75 CRI enhances all original colors
APPLICATION: Rural Road, Commercial Square, Garden, Villa


TAR5671



Item No.	Wattage	Led Qty	Initial Luminous Flux (lm)	CCT	Driver Efficiency	Driver Pcs/Cs	Weight (kgs)	Can Size (cm)	Lamp Dimension(mm)
TAR5671	50	30	4968	4000-5000K	>97%	INC/30CE	1	ø54x55/2	L440*W440*H1770



CREE 30PCS




LED TAR Module

TAR MODULE



TAR-5671 50W



TECHNICAL SPECIFICATIONS

SERIES: TAR5471
MATERIAL: Aluminum body+PC
INPUT VOLTAGE: 120-277VAC
WORKING CURRENT: 530MA
POWER FACTOR: 0.96
LED QTY: 30pcs of LEDs
TOTAL CONSUMPTION: 50W
EFFICACY: >97 lm/w
LED: Cree XPG2
BEAM PATTERN: TD1
COLOR RENDERING INDEX: More than 75
PIPE MOUNTING DIA: 1 in. (26mm)
IP RATING: IP65
WORKING CONDITION: Temperature: -40°C~55°C
 Humidity: 10%~95%
LIFETIME: More than 50,000 hrs

FEATURES

WARRANTY: 5 Years
POWER SAVING: At least 60% Energy Saving
LONG LIFE: LEDs last for more than 50,000hrs
 (12hrs/day for about 10years)
HEAT DISSIPATION: Patented heat dissipation design,
 achieve optimum efficiency
MODULAR DESIGN: Can replace the module directly,
 if you want another kind of application
LAB TESTED: National testing lab test in
 accordance with IES Standards
SOLID-STATE: High-Shock and High-Vibration Resistant
INSTANT-ON: Light turn on right away, without delay in Re-Strike
HIGH CRI: 75 CRI enhances all original colors
APPLICATION: Rural Road, Commercial Square, Garden, Villa


TAR5471



Item No.	Wattage	Led Qty	Initial Luminous Flux (4000K)	CCT	Driver Efficiency	Driver Pcs/Ckt	Weight (kgs)	Clt-Size (cm)	Lamp Dimension(mm)
TAR5471	50	30	4965	4000±300K	>97%	INCLUDE 1	1.1	52x50x68	L520*W520*H680



CREE 30PCS



LED TAR Module

TAR MODULE



TAR-5471

50W



TECHNICAL SPECIFICATIONS


SERIES: AST130-
MATERIAL: Aluminium body+PC
INPUT VOLTAGE: 120-277VAC
WORKING CURRENT: 700MA
POWER FACTOR: 0.96
LED QTY: 16~120pcs of LEDs
TOTAL CONSUMPTION: 35W-280W
EFFICACY: >97lm/w
LED: Cree XPG2
BEAM PATTERN: A01, A02, A03
COLOR RENDERING INDEX: More than 75
PIPE MOUNTING DIA: 1.89-2.36 in. (48mm-60mm)
IP RATING: IP65
WORKING CONDITION: Temperature: -40°C ~ 55°C
 Humidity: 10%~95%
LIFETIME: More than 50,000 hrs

FEATURES

WARRANTY: 5 years
POWER SAVING: At least 60% Energy Saving
LONG LIFE: LEDs last for more than 50,000hrs
 (12hrs/day for about 10years)
HEAT DISSIPATION: Patented heat dissipation design,
 achieve optimum efficiency
MODULAR DESIGN: Can replace the module directly,
 if you want another kind of application
KNUCKLE: Can adjust the angle from 0 degree to 90 degree
LAB TESTED: National listing lab test in
 accordance with IES Standards
SOLID-STATE: High-Shock and High-Vibration Resistant
INSTANT-ON: Light turn on right away, without delay in Re-Strike
HIGH CRI: 75 CRI enhances all original colors
APPLICATION: Main Road, Express Way, Rural Road,
 Commercial Square, Garden, Villa

LED Street Light Series**AST1301~08**

Item No.	Wattage	Module Qty	Initial Luminous Flux (lm)	CCT	Driver Efficiency	Driver	Pcs/Ctr	Weight	Ch Size	Lamp Dimension(mm)
AST1301	35	1	3975	4000±300K	>97%	INCLUDE	1	7.7	48x42x17	1.389xW345xH95
AST1302	70	2	7942	4000±300K	>97%	INCLUDE	1	8.4	54x42x17	1.461xW345xH95
AST1303	105	3	10961	4000±300K	>97%	INCLUDE	1	9.1	60x42x17	1.523xW345xH95
AST1304	140	4	14404	4000±300K	>97%	INCLUDE	1	9.8	66x42x17	1.585xW345xH95
AST1305	175	5	17852	4000±300K	>97%	INCLUDE	1	10.5	72x42x17	1.647xW345xH95
AST1306	210	6	21633	4000±300K	>97%	INCLUDE	1	11.2	78x42x17	1.709xW345xH95
AST1307	245	7	25234	4000±300K	>97%	INCLUDE	1	11.9	84x42x17	1.771xW345xH95
AST1308	280	8	28565	4000±300K	>97%	INCLUDE	1	12.6	90x42x17	1.833xW345xH95

**Ordering info**

Example AST1302 Street Light

Ordering Code AST1302. 1302. A01. 40. SG. V22. 1. 0

1 2 3 4 5 6 7

1. Wattage

AST1301: 35W	AST1304: 140W	AST1307: 245W
AST1302: 70W	AST1305: 175W	AST1308: 280W
AST1303: 105W	AST1306: 210W	

2. Light Distribution

A01 A02 A03

3. Color Temp

30: 3000±300K 40: 4000±300K 50: 5000±300K

4. Housing Color

GY: Dark Grey SG: Silver Grey BK: Black DG: Dark Green

5. Input Voltage

V22: AC 220-240 V V27: AC 100-277V

6. Philips Driver

0 Without 1 With

7. Photocell

0 Without 1 With

AST1302**70W****AST1301****35W****AST1303****105W****140W****AST1304**

TECHNICAL SPECIFICATIONS

SERIES: AST160-
MATERIAL: Aluminium body+PC
INPUT VOLTAGE: 120-277VAC
WORKING CURRENT: 700MA
POWER FACTOR: 0.96
LED QTY: 16-64pcs of LEDs
TOTAL CONSUMPTION: 35W-140W
EFFICACY: >97lm/w
LED: Cree XPG2
BEAM PATTERN: A01,A02,A03
COLOR RENDERING INDEX: More than 75
PIPE MOUNTING DIA: 1.89-2.36 in. (48mm-60mm)
IP RATING: IP65
WORKING CONDITION: Temperature:-40°C-55°C
 Humidity: 10%-95%
LIFETIME: More than 50,000 hrs


FEATURES

WARRANTY: 5 Years
POWER SAVING: At least 60% Energy Saving
LONG LIFE: LEDs last for more than 50,000hrs
 (120hrs/day for about 10years)
HEAT DISSIPATION: Patented heat dissipation design,
 achieve optimum efficiency
MODULAR DESIGN: Can replace the module directly,
 if you want another kind of application
KNUCKLE: Can adjust the angle from 0 degree to 90 degree
LAB TESTED: National listing lab test in
 accordance with IES Standards
SOLID-STATE: High-Shock and High-Vibration Resistant
INSTANT-ON: Light turn on right away, without delay in Re-Strikes
HIGH CRI: 75 CRI enhances all original colors
APPLICATION: Main Road, Express Way, Rural Road,
 Commercial Square, Garden, Villa

AST1601~04

CE RoHS IP65


Item No.	Wattage	Module Qty	Initial Luminous Flux (6000K)	CCT	Driver Efficiency	Driver	Pcs/Ct	Weight	Qty Size	Lamp Dimension(mm)
AST1601	35	1	2699	4000±300K	>97%	INCLUDE	1	7.4	44x42x17	L230*W345*H81
AST1602	70	2	7042	3000±300K	>97%	INCLUDE	1	8.1	50x42x17	L290*W345*H81
AST1603	105	3	10661	4000±300K	>97%	INCLUDE	1	8.8	56x42x17	L354*W345*H81
AST1604	140	4	14402	3000±300K	>97%	INCLUDE	1	9.5	62x42x17	L418*W345*H81

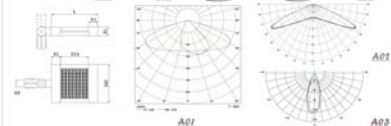

Ordering info	Example:AST1602 Street Light Ordering Code:AST1602, 1602, A01, 40, SG, Y22, 1, 0 1 2 3 4 5 6 7	
1.Wattage	AST1601: 35W	AST1604: 140W
	AST1602: 70W	
	AST1603: 105W	
2.Light Distribution	A01	A02 A03
3.Color Temp	30 3000±300K 40: 4000±300K 50: 5000±300K	
4.Housing Color	GY: Dark Grey SG: Silver Grey BK: Black DG: Dark Green	
5.Input Voltage	V22: AC 220-240 V V27: AC 100-277V	
6.Philips Driver	0:Without 1:With	
7.Protect	0:Without 1:With	

LED Street Light Series**AST1603**

105W



70W

AST1602

TECHNICAL SPECIFICATIONS

SERIES: AST170-
MATERIAL: Aluminium body+PC
INPUT VOLTAGE: 120-277VAC
WORKING CURRENT: 700MA
POWER FACTOR: 0.96
LED QTY: 16-128pcs of LEDs
TOTAL CONSUMPTION: 35W-300W
EFFICACY: >97lm/w
LED: Cree XP02
BEAM PATTERN: A01, A02, A03
COLOR RENDERING INDEX: More than 75
PIPE MOUNTING DIA: 1.89-2.36 in. (48mm-60mm)
IP RATING: IP65
WORKING CONDITION: Temperature: -40°C~55°C
 Humidity: 10%-95%
LIFETIME: More than 50,000 hrs


FEATURES

WARRANTY: 5 Years
POWER SAVING: At least 60% Energy Saving
LONG LIFE: LEDs last for more than 50,000hrs
 (12hrs/day for about 10years)
HEAT DISSIPATION: Patented heat dissipation design,
 achieve optimum efficiency
MODULAR DESIGN: Can replace the module directly,
 if you want another kind of application
KNUCKLE: Can adjust the angle from 0 degree to 90 degree
LAB TESTED: National listing lab test in
 accordance with IES Standards
SOLID-STATE: High-Shock and High-Vibration Resistant
INSTANT-ON: Light turn on right away without delay in Re-Strike
HIGH CRI: 75 CRI enhances all original colors
APPLICATION: Tunnel, Building, Commercial Square, Warehouse,
 Supermarket

AST1701~04



Item No.	Wattage	Module Qty	Initial Luminary Flux (lm/90°)	CCT	Driver Efficiency	Driver	Pcs/Ctr	Weight	Cp Size	Lamp Dimension(mm)
AST1701	35	1	3073	4000±300K	>97%	INCLUDE	1	6.9	314x2x23	L230*W345*H81
AST1702	70	2	7042	4000±300K	>97%	INCLUDE	1	7.6	374x2x23	L290*W345*H81
AST1703	105	3	10961	4000±300K	>97%	INCLUDE	1	8.3	434x2x23	L354*W345*H81
AST1704	140	4	14404	4000±300K	>97%	INCLUDE	1	9	494x2x23	L418*W345*H81
AST1705	175	5	17852	4000±300K	>97%	INCLUDE	1	9.7	554x2x23	L478*W345*H81
AST1706	210	6	21633	4000±300K	>97%	INCLUDE	1	10.4	614x2x23	L540*W345*H81
AST1707	245	7	25234	4000±300K	>97%	INCLUDE	1	11.1	674x2x23	L602*W345*H81
AST1708	280	8	28568	4000±300K	>97%	INCLUDE	1	11.8	744x2x23	L664*W345*H81

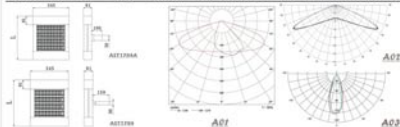


Example AST1702 Flood Light

Ordering Code: AST1702, 1702, A01, 40, SG, Y22, 1, 0
 1 2 3 4 5 6 7

1. Wattage	AST1701: 35W	AST1704: 140W	AST1707: 245W
	AST1702: 70W	AST1705: 175W	AST1708: 280W
	AST1703: 105W	AST1706: 210W	
2. Light Distribution	A01	A02	A03
3. Color Temp	30: 3000±300K 40: 4000±300K 50: 5000±300K		
4. Housing Color	GY: Dark Grey SG: Silver Grey BK: Black DG: Dark Green		
5. Input Voltage	V22: AC 220-240 V V27: AC 100-277V		
6. Philips Driver	0: Without 1: With		
7. Photocell	0: Without 1: With		

LED Flood Light Series



70W

AST1702



AST1703A

105W



140W

AST1704

TECHNICAL SPECIFICATIONS

SERIES: AST180-
MATERIAL: Aluminum body+PC
INPUT VOLTAGE: 120-277VAC
WORKING CURRENT: 700MA
POWER FACTOR: 0.96
LED QTY: 16-48pcs of LEDs
TOTAL CONSUMPTION: 35W-105W
EFFICIACY: >97lm/w
LED: Cree XPG2
BEAM PATTERN: A01,A02,A03
COLOR RENDERING INDEX: More than 75
IP RATING: IP65
WORKING CONDITION: Temperature:-40°C~55°C
 Humidity:10%-95%
LIFETIME: More than 50,000 hrs





FEATURES

WARRANTY: 5 Years
POWER SAVING: At least 60% Energy Saving
LONG LIFE: LEDs last for more than 50,000hrs
 (12hrs/day for about 10years)
HEAT DISSIPATION: Patented heat dissipation design,
 achieve optimum efficiency
MODULAR DESIGN: Can replace the module directly,
 if you want another kind of application
LAB TESTED: National testing lab test in
 accordance with IES Standards
SOLID-STATE: High-Shock and High-Vibration Resistant
INSTANT-ON: Light turn on right away, without delay in Re-Strikes
HIGH CRI: 75 CRI enhances all original colors
APPLICATION: Wall,Building

AST1801~04

CE GS IP65

Item No.	Wattage	Module Qty	Initial Luminous Flux (4000K)	CCT	Driver Efficiency	Driver	Pcs/Cs/Weight	Cs-Size	Lamp Dimension(mm)
AST1801	35	1	2699	4000±300K	>97%	INCLUDE	1 3 4	32*42*23	L245*W345*H196
AST1802	70	2	7042	4000±300K	>97%	INCLUDE	1 7 5	36*42*23	L307*W345*H196
AST1803	105	3	10961	4000±300K	>97%	INCLUDE	1 6 2	43*42*23	L369*W345*H196
AST1804	140	4	14404	4000±300K	>97%	INCLUDE	1 8 9	50*42*23	L431*W345*H196



A01

A02

A03

Ordering info

Example:AST1802 Street Light
 Ordering Code:AST1802. 1802. A01. 40. SG. V22. 1. 0
 1 2 3 4 5 6 7

1.Wattage

AST1801: 35W AST1804: 140W
 AST1802: 70W
 AST1803: 105W

2.Light Distribution

A01 A02 A03

3.Color Temp.

30: 3000±300K 40: 4000±300K 50: 5000±300K

4.Housing Color

GY: Dark Grey SG: Silver Grey BK: Black DG: Dark Green

5.Input Voltage

V22: AC 220-240 V V27: AC 100-277V

6.Philips Driver

0:Without 1:With

7.Protocol

0:Without 1:With

LED Wall Light Series



ARLUX

105W



ARLUX

70W



TECHNICAL SPECIFICATIONS

SERIES: AST190-
MATERIAL: Aluminum body+PC
INPUT VOLTAGE: 120-277VAC
WORKING CURRENT: 700mA
POWER FACTOR: 0.96
LED QTY: 16-48pcs of LEDs
TOTAL CONSUMPTION: 35W-105W
EFFICACY: >97lm/w
LED: Cree XPG2
BEAM PATTERN: A01, A02, A03
COLOR RENDERING INDEX: More than 75
IP RATING: IP65
WORKING CONDITION: Temperature: -40°C~55°C
 Humidity: 10%-95%
LIFETIME: More than 50,000 hrs




FEATURES

WARRANTY: 5 Years
POWER SAVING: At least 60% Energy Saving
LONG LIFE: LEDs last for more than 50,000hrs
 (12hrs/day for about 10years)
HEAT DISSIPATION: Patented heat dissipation design,
 achieve optimum efficiency
MODULAR DESIGN: Can replace the module directly,
 if you want another kind of application
LAB TESTED: National listing lab test
 in accordance with IES Standards
SOLID-STATE: High-Shock and High-Vibration Resistant
INSTANT-ON: Light turn on right away, without delay in Re-Strikes
HIGH CRI: 75 CRI enhances all original colors
APPLICATION: Wall Building

AST1901~04



Item No.	Wattage	Module Qty	Input Luminous Flux (lm)	CCT	Driver Efficiency	Driver Pcs/Ckt	Weight	Ckt Size	Lamp Dimension(mm)
AST1901	35	1	3699	4000±300K	>97%	INCLUDE 1	6.2	31.5x42x23	L234xW345xH196
AST1902	70	2	7042	4000±300K	>97%	INCLUDE 1	6.9	37x42x23	L296xW345xH196
AST1903	105	3	10661	4000±300K	>97%	INCLUDE 1	7.6	43x42x23	L358xW345xH196
AST1904	140	4	14404	4000±300K	>97%	INCLUDE 1	8.3	49x42x23	L420xW345xH196



A01

A02

Ordering info

Example AST1903 Street Light
 Ordering Code: AST1903, 1903, A01, 40, SG, V22, 1, 0
 1 2 3 4 5 6 7

1.Wattage

AST1901: 35W AST1904: 140W
 AST1902: 70W
 AST1903: 105W

2.Light Distribution

A01 A02 A03

3.Color Temp

30: 3000±300K 40: 4000±300K 50: 5000±300K

4.Housing Color

GY: Dark Grey SG: Silver Grey BK: Black DG: Dark Green

5.Input Voltage

V22: AC 220-240 V V27: AC 100-277V

6.Philips Driver

0: Without 1: With

7.PhotoCell

0: Without 1: With

LED Wall Light Series



AST1903 105W



AST1902 70W



AST1904 140W













TECHNICAL SPECIFICATIONS


SERIES: AST1151-
MATERIAL: Aluminum body+PC
INPUT VOLTAGE: 120-277VAC
WORKING CURRENT: 700MA
POWER FACTOR: 0.96
LED QTY: 16-64pcs of LEDs
TOTAL CONSUMPTION: 35W-140W
EFFICACY: >97lm/w
LED: Cree XPG2
BEAM PATTERN: A01_B01_C01_D01
COLOR RENDERING INDEX: More than 75
PIPE MOUNTING DIA: 1.89-2.36 in. (48mm-60mm)
IP RATING: IP65
WORKING CONDITION: Temperature: -40°C~55°C
 Humidity: 10%~95%
LIFETIME: More than 50,000 hrs

FEATURES

WARRANTY: 5 Years
POWER SAVING: At least 60% Energy Saving
LONG LIFE: LEDs last for more than 50,000hrs
 (12hrs/day for about 10years)
HEAT DISSIPATION: Patented heat dissipation design,
 achieve optimum efficiency
MODULAR DESIGN: Can replace the module directly,
 if you want another kind of application
KNUCKLE: Can adjust the angle from 0 degree to 90 degree
LAB TESTED: National listing lab test in
 accordance with IES Standards
SOLID-STATE: High-Shock and High-Vibration Resistant
INSTANT-ON: Light turn on right away without delay in Re-Strike
HIGH CRI: 75 CRI enhances all original colors
APPLICATION: Main Road, Express Way, Rural Road,
 Commercial Square, Garden, Villa

AST1151~54

Item No.	Wattage	Led Qty	Initial Luminous Flux (4000K)	CCT	Driver Efficiency	CRI	Power Factor	Warranty (Years)	Module Code	Module Picture
AST1151	35	16	3696	4000±300K	>97%	>75	0.96	5	A01	
AST1152	70	32	7342	4000±300K	>97%	>75	0.96	5	A02	
AST1153	105	48	10661	4000±300K	>97%	>75	0.96	5	A03	
AJA115	40	18	4162	4000±300K	>97%	>75	0.96	5	AJA	
AUS1152	35	18	3699	5000±300K	>97%	>75	0.96	5	AUS	
AUS1153	55	24	5528	5000±300K	>97%	>75	0.96	5	AUS	
AST115B1	35	16	3699	4000±300K	>97%	>75	0.96	5	AST	
AST115B2	70	32	7342	4000±300K	>97%	>75	0.96	5	AST	
AST115B3	105	48	10661	4000±300K	>97%	>75	0.96	5	AST	
AJA115B	40	18	4162	4000±300K	>97%	>75	0.96	5	AJA	
AUS115B2	35	18	3699	4000±300K	>97%	>75	0.96	5	AUS	
AUS115B3	55	24	5528	4000±300K	>97%	>75	0.96	5	AUS	



Ordering info

Example AST1151 Street Light
 Ordering Code: AST1151_35W_A01_40_5G_V22_1
 1 2 3 4 5 6

1. Wattage	AST1151_35W	AST115B1_35W	AJA115_40W	AST1153_55W
	AST1152_70W	AST115B2_70W	AJA115B_40W	AST115B_35W
	AST1153_105W	AST115B3_35W	AUS1152_35W	AST115B_55W
2. Light Distribution	A01	B01	C01	
3. Color Temp.	30	3000±300K	40	4000±300K
	50	5000±300K		
4. Housing Color	GY: Dark Grey	SG: Silver Grey	BK: Black	DD: Dark Green
	WH: White			
5. Input Voltage	V22	AC 220-240 V	V27	AC 100-277V
6. Philips Driver		0: Without	1: With	

LED Street Light Series



AUS1152
35W



AST1151


AST1152

AUT115

35W

70W

50W



AST1152V2

70W



AST115B2

70W



TECHNICAL SPECIFICATIONS

SERIES: AUA155
MATERIAL: Aluminium body+PC
INPUT VOLTAGE: 120-277VAC
WORKING CURRENT: 700mA
POWER FACTOR: ≥ 90
LED QTY: 18pcs of LEDs
TOTAL CONSUMPTION: 40W
EFFICACY: >97lm/w
LED: Cree XPG2
BEAM PATTERN: A01, B01, C01
COLOR RENDERING INDEX: More than 75
PIPE MOUNTING DIA.: 1.89-2.36 in. (48mm-60mm)
IP RATING: IP65
WORKING CONDITION: Temperature: -40°C ~ 55°C
 Humidity: 10% ~ 95%
LIFETIME: More than 50,000 hrs


FEATURES

WARRANTY: 5 Years
POWER SAVING: At least 60% Energy Saving
LONG LIFE: LEDs last for more than 50,000hrs
 (120days for about 10years)
HEAT DISSIPATION: Patented heat dissipation design,
 achieve optimum efficiency
MODULAR DESIGN: Can replace the module directly,
 if you want another kind of application
LAB TESTED: National testing lab test in
 accordance with IES Standards
SOLID-STATE: High-Shock and High-Vibration Resistant
INSTANT-ON: Light turn on right away, without delay in Re-Strike
HIGH CRI: 75 CRI enhances all original colors
APPLICATION: Main Road, Express Way, Rural Road,
 Commercial Square, Garden, Villa

AST1551~54



Item No.	Wattage	Led Qty (Pcs)	Initial/Lumens Flux (4000K)	CCT	Driver Efficiency	CRI	Power Factor	Warranty (Years)	Module Code	Module Picture
AST1551	35	18	3699	4000±300K	>97%	>75	0.96	5	AST	
AST1552	70	32	7042	4000±300K	>97%	>75	0.96	5	AST	
AST1553	105	48	10661	4000±300K	>97%	>75	0.96	5	AST	
AUA155	40	18	4162	4000±300K	>97%	>75	0.96	5	AUA	
AUS1552	35	18	3699	4000±300K	>97%	>75	0.96	5	AUS	
AUS1553	55	24	5528	4000±300K	>97%	>75	0.96	5	AUS	



Ordering info	
Example: AST1551 Street Light Ordering Code: AST1551_35W_A01_40_SG_V22_1 1 2 3 4 5 6	
1. Wattage	AST1551: 35W AUA155: 40W AST1552: 70W AUS1552: 35W AST1553: 105W AUS1553: 55W
2. Light Distribution	A01 B01 C01
3. Color Temp	30: 3000±300K 40: 4000±300K 50: 5000±300K
4. Housing Color	GY: Dark Grey SG: Silver Grey BK: Black DG: Dark Green WH: White
5. Input Voltage	V22: AC 220-240 V V27: AC 100-277V
6. Philips Driver	0: Without 1: With

LED Street Light Series



AUA155

40W

ARLUX



AUS1553
55W
 New Top



AST1552

70W



TECHNICAL SPECIFICATIONS

SERIES: AST1861-
MATERIAL: Aluminum body+PC
INPUT VOLTAGE: 120-277VAC
WORKING CURRENT: 700MA
POWER FACTOR: 0.96
LED QTY: 16-48pcs of LEDs
TOTAL CONSUMPTION: 35W-105W
EFFICACY: >97lm/w
LED: Cree XPG2
BEAM PATTERN: A01,A02,A03
COLOR RENDERING INDEX: More than 75
PIPE MOUNTING DIA: 1.89-2.36 in. (48mm-60mm)
IP RATING: IP65
WORKING CONDITION: Temperature: -40°C~55°C
 Humidity: 10%-95%
LIFETIME: More than 50,000 hrs


FEATURES

WARRANTY: 5 Years
POWER SAVING: At least 60% Energy Saving
LONG LIFE: LEDs last for more than 50,000hrs
 (12hrs/day for about 10years)
HEAT DISSIPATION: Patented heat dissipation design,
 achieve optimum efficiency
MODULAR DESIGN: Can replace the module directly,
 if you want another kind of application
LAB TESTED: National testing lab test in
 accordance with IES Standards
SOLID-STATE: High-Shock and High-Vibration Resistant
INSTANT-ON: Light turn on right away, without delay in Re-Strikes
HIGH CRI: 75 CRI enhances all original colors
APPLICATION: Main Road, Express Way, Rural Road,
 Commercial Square, Garden, Villa

AST1861~63



Item No.	Wattage	Module Qty	Initial Luminous Flux (4000K)	CCT	Driver Efficiency	Driver	Pcs/Cr/Weight	Cri Size	Lamp Dimension(mm)
AST1861	35	1	2600	4000±300K	>97%	INCLUDE	1 0.4	49x49x18	L475xW475xH160
AST1862	70	2	7042	4000±300K	>97%	INCLUDE	1 0.1	49x49x18	L475xW475xH160
AST1863	105	3	10661	4000±300K	>97%	INCLUDE	1 0.8	49x49x18	L475xW475xH160

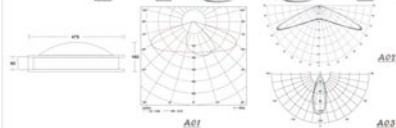

Ordering info	Example AST1862 Street Light	
Ordering Code	AST1862, 1862, A01, 40, SG, V22, 1, 0	
	1 2 3 4 5 6 7	
1. Wattage	AST1861: 35W	140W
	AST1862: 70W	
	AST1863: 105W	
2. Light Distribution	A01	A02 A03
3. Color Temp	30: 3000±300K	40: 4000±300K 50: 5000±300K
4. Housing Color	GY: Dark Grey	SG: Silver Grey BK: Black DG: Dark Green
5. Input Voltage	V22: AC 220-240 V V27: AC 100-277V	
6. Philips Driver	0: Without 1: With	
7. Photocell	0: Without 1: With	

LED Street Light Series



AST1862

70W



AST1861

35W



AST1863

105W

TECHNICAL SPECIFICATIONS

SERIES: AUA191
MATERIAL: Aluminium body+PC
INPUT VOLTAGE: 120-277VAC
WORKING CURRENT: 700MA
POWER FACTOR: 0.96
LED Q'TY: 18pcs of LEDs
TOTAL CONSUMPTION: 40W
EFFICACY: >97lm/w
LED: Cree XPG2
BEAM PATTERN: A01, B01, C01
COLOR RENDERING INDEX: More than 75
PIPE MOUNTING DIA: 1.80-2.36 in. (48mm-60mm)
IP RATING: IP65
WORKING CONDITION: Temperature: -40C~55 C
 Humidity: 10%-95%
LIFETIME: More than 50,000 hrs


FEATURES

WARRANTY: 5 Years
POWER SAVING: At least 80% Energy Saving
LONG LIFE: LEDs last for more than 50,000hrs
 (12hrs/day for about 10years)
HEAT DISSIPATION: Patented heat dissipation design,
 achieve optimum efficiency
MODULAR DESIGN: Can replace the module directly,
 if you want another kind of application
KNUCKLE: Can adjust the angle from 0 degree to 90 degree
LAB TESTED: National testing lab test in
 accordance with IES Standards
SOLID-STATE: High Shock and High-Vibration Resistant
INSTANT-ON: Light turn on right away, without delay in Re-Strike
HIGH CRI: 75 CRI enhances all original colors
APPLICATION: Main Road, Express Way, Rural Road,
 Commercial Square, Garden, Villa

AUA191



Item No.	Wattage	LED Q'Ty (Pcs)	Initial/Lumens Flux (4000K)	CCT	Driver Efficiency	CRI	Power Factor	Warranty (Years)	Module Code	Module Picture
AST1911	35	18	3699	4000±300K	>97%	>75	0.96	5	AST	
AST1912	70	32	7042	4000±300K	>97%	>75	0.96	5	AST	
AUA191	40	18	4162	4000±300K	>97%	>75	0.96	5	AUA	
AUS1912	35	18	3699	4000±300K	>97%	>75	0.96	5	AUS	
AUS1913	55	24	5528	4000±300K	>97%	>75	0.96	5	AUS	
AST191B1	35	18	3699	4000±300K	>97%	>75	0.96	5	AST	
AST191B2	70	32	7042	4000±300K	>97%	>75	0.96	5	AST	
AUA191B	40	18	4162	4000±300K	>97%	>75	0.96	5	AUA	
AUS191B2	35	18	3699	4000±300K	>97%	>75	0.96	5	AUS	
AUS191B3	55	24	5528	4000±300K	>97%	>75	0.96	5	AUS	



Ordering info

Example: AUS191B Street Light

Ordering Code: AUA191B, 40W, C01, 40, SG, V22, 1

1. Wattage

AUA191: 40W
 AUA191B: 40W
 AUS1912: 35W
 AUS191B3: 55W

2. Light Distribution

A01 B01 C01

3. Color Temp

30, 3000±300K, 40, 4000±300K, 50, 5000±300K

4. Housing Color

GY: Dark Grey SG: Silver Grey BK: Black DG: Dark Green WH: White

5. Input Voltage

V22: AC 220-240 V V27: AC 100-277V

LED Street Light Series



AUA191



40W



AST1911

35W



AUS191B2

35W



AUA191B

40W

TECHNICAL SPECIFICATIONS




SERIES: AUS197S2
MATERIAL: Aluminium body+PC
INPUT VOLTAGE: 120-277VAC
WORKING CURRENT: 700MA
POWER FACTOR: 0.96
LED Q'TY: 16pcs of LEDs
TOTAL CONSUMPTION: 35W-55W
EFFICACY: >97lm/w
LED: Cree XPG2
BEAM PATTERN: B01, C01
COLOR RENDERING INDEX: More than 75
PIPE MOUNTING DIA: 1.89-2.36 in (48mm-60mm)
IP RATING: IP65
WORKING CONDITION: Temperature -40°C-55°C
 Humidity: 10%-95%
LIFETIME: More than 50,000 hrs



FEATURES

WARRANTY: 5 Years
POWER SAVING: At least 60% Energy Saving
LONG LIFE: LEDs last for more than 50,000hrs
 (12hr/day for about 10years)
HEAT DISSIPATION: Patented heat dissipation design,
 achieve optimum efficiency
MODULAR DESIGN: Can replace the module directly,
 if you want another kind of application
KNUCKLE: Can adjust the angle from 0 degree to 90 degree
LAB TESTED: National testing lab test in
 accordance with IES Standards
SOLID-STATE: High-Shock and High-Vibration Resistant
INSTANT-ON: Light turn on right away without delay in Re-Strike
HIGH CRI: 75 CRI enhances all original colors
APPLICATION: Main Road, Express Way, Rural Road,
 Commercial Square, Garden, Villa

AUS197S2

CE RoHS IP65

Item No.	Wattage	Led Qty (Pcs)	Initial Luminous Flux (lm)	CCT	Driver Efficiency	CRI	Power Factor	Warranty (Years)	Module Code	Module Picture
AUS197S2	35	16	2699	4000±300K	>97%	>75	0.96	5	AUS	
AUS197S3	55	24	5528	4000±300K	>97%	>75	0.96	5	AUS	
AUA197S	40	16	4182	4000±300K	>97%	>75	0.96	5	AUA	



Ordering Info	Example: AUS197S2 Street Light Ordering Code: AST197S2_35W_ A01_ 40_ SG_ V22_ 1 1 2 3 4 5 6
1. Wattage	AUS197S2 35W AUS197S3 55W AUA197S 40W
2. Light Distribution	B01 C01
3. Color Temp	30: 3000±300K 40: 4000±300K 50: 5000±300K
4. Housing Color	GY: Dark Grey SG: Silver Grey BK: Black DG: Dark Green WH: White
5. Input Voltage	V22: AC 220-240 V V27: AC 100-277V
6. Philips Driver	0: Without 1: With

LED Street Light Series



ARLUX

AUS197S2

35W



TECHNICAL SPECIFICATIONS

SERIES: AUA1982
MATERIAL: Aluminium body+PC
INPUT VOLTAGE: 120-277VAC
WORKING CURRENT: 700MA
POWER FACTOR: 0.96
LED QTY: 16pcs of LEDs
TOTAL CONSUMPTION: 35W/55W
EFFICACY: >97lm/w
LED: Cree XPG2
BEAM PATTERN: B01, C01
COLOR RENDERING INDEX: More than 75
PIPE MOUNTING DIA.: 1.89-2.36 in. (48mm-60mm)
IP RATING: IP65
WORKING CONDITION: Temperature: -40°C ~ 55°C
 Humidity: 10% ~ 95%
LIFETIME: More than 50,000 hrs


FEATURES

WARRANTY: 5 Years
POWER SAVING: At least 60% Energy Saving
LONG LIFE: LEDs last for more than 50,000hrs
 (12hr/day for about 10years)
HEAT DISSIPATION: Patented heat dissipation design,
 achieve optimum efficiency
MODULAR DESIGN: Can replace the module directly,
 if you want another kind of application
KNUCKLE: Can adjust the angle from 0 degree to 90 degree
LAB TESTED: National testing lab test in
 accordance with IES Standards
SOLID-STATE: High-Shock and High-Vibration Resistant
INSTANT-ON: Light turn on right away, without delay in Re-Strike
HIGH CRI: 75 CRI enhances all original colors
APPLICATION: Main Road, Express Way, Rural Road,
 Commercial Square, Garden, Villa

AUS1982



Item No.	Wattage	Led Qty (Pcs)	Initial Luminous Flux (4000K)	CCT	Driver Efficiency	CRI	Power Factor	Warranty (Years)	Module Code	Module Picture
AUA198	40	16	4162	4000±300K	>97%	>75	0.96	5	AUA	
AUS1982	35	16	3699	4000±300K	>97%	>75	0.96	5	AUS	
AUS1983	55	24	5528	4000±300K	>97%	>75	0.96	5	AUS	
AUA198B	40	16	4162	4000±300K	>97%	>75	0.96	5	AUA	
AUS198B2	35	16	3699	4000±300K	>97%	>75	0.96	5	AUS	
AUS198B3	55	24	5528	4000±300K	>97%	>75	0.96	5	AUS	



Ordering info

Example: AUS198B Street Light
 Ordering Code: AUA198B, 40W, C01, 40, SG, V22, 1
 1 2 3 4 5 6

1. Wattage

AUA198: 40W AUS1983: 55W
 AUA198B: 40W AUS198B2: 35W
 AUS1982: 35W AUS198B3: 55W

2. Light Distribution

B01 C01

3. Color Temp

30: 3000±300K 40: 4000±300K 50: 5000±300K

4. Housing Color

GY: Dark Grey SG: Silver Grey BK: Black DG: Dark Green WH: White

5. Input Voltage

V22: AC 220-240 V V27: AC 100-277V



AUS1982

35W



AUS198B2

35W

